




## PRODUCT DATASHEET | EA16.11PRO4

### BLUETOOTH MINI RECESSED MULTIFUNCTION 1 CHANNEL SWITCH

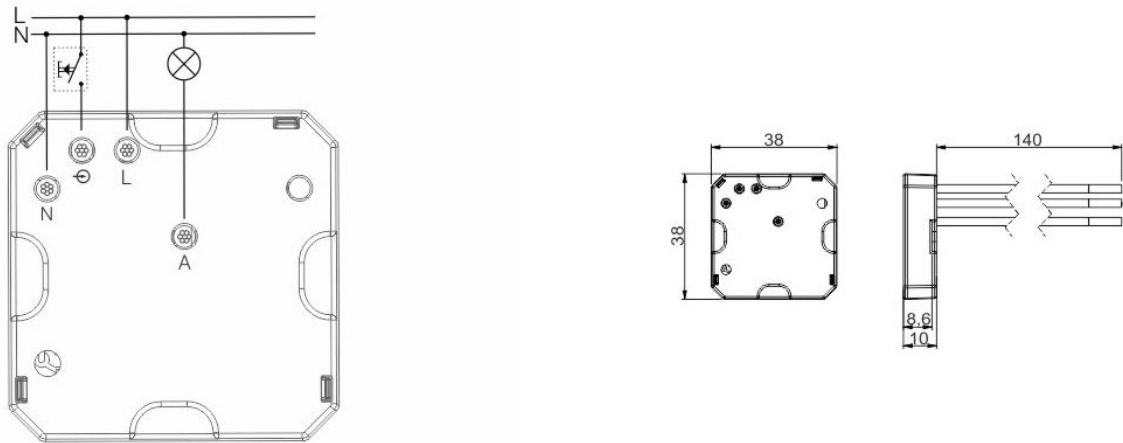

## DESCRIPTION

Mini recessed switch with astro function. Using mi.puck products, you can easily control, regulate and automate numerous applications in your home through the free mi.puck app, using a cell phone or tablet. The mi.puck app is available for Apple and Android devices.

The recessed mi.puck switches and mi.puck dimmers are small built-in devices that can be easily installed in recessed boxes behind existing switches.

This allows you to continue to control your applications manually via switches as usual, as well as additionally control or program them via the app.



## SPECIFICATIONS

|                                                 |             |
|-------------------------------------------------|-------------|
| <b>Brand:</b>                                   | Hugo muller |
| <b>Product type:</b>                            | Switch      |
| <b>Mounting method:</b>                         | Other       |
| <b>Number of channels:</b>                      | 1           |
| <b>Supply voltage:</b>                          | 230 V       |
| <b>Power supply voltage type:</b>               | AC          |
| <b>Frequency supply voltage:</b>                | 50 - 60 Hz  |
| <b>Autonomy in years:</b>                       | 10          |
| <b>Text guidance in the display:</b>            | No          |
| <b>External programming:</b>                    | Yes         |
| <b>Incl. memory card :</b>                      | Yes         |
| <b>60-minute program:</b>                       | Yes         |
| <b>24-hour program:</b>                         | Yes         |
| <b>Weekly Program:</b>                          | Yes         |
| <b>Annual Program:</b>                          | Yes         |
| <b>Vacation Program:</b>                        | Yes         |
| <b>Impulse program:</b>                         | No          |
| <b>Cycle Program:</b>                           | Yes         |
| <b>Astro Program:</b>                           | Yes         |
| <b>Coincidence Program:</b>                     | Yes         |
| <b>Operating hour meter:</b>                    | No          |
| <b>Quartz-controlled:</b>                       | Yes         |
| <b>Radio-controlled:</b>                        | No          |
| <b>Radio-controlled (DCF77):</b>                | No          |
| <b>GPS:</b>                                     | No          |
| <b>Shortest switching time channel 1:</b>       | 1 min       |
| <b>Shortest switching time channel 2:</b>       | 1 min       |
| <b>Number of memory locations:</b>              | 100         |
| <b>Automatic summer/winter time changeover:</b> | Yes         |



|                                   |         |
|-----------------------------------|---------|
| Manual:                           | No      |
| External pressure contact input:  | No      |
| Preset switching:                 | No      |
| Potential-free switching contact: | Yes     |
| Degree of protection (IP):        | IP20    |
| Width:                            | 44 mm   |
| Height:                           | 41.5 mm |
| Depth:                            | 20 mm   |

DOWNLOADS AVAILABLE FROM WEBSITE

|           |
|-----------|
| Datasheet |
| Manual    |