INTERLIGHTLED.COM

MANUAL

THINQ DALI CEILING MOUNTED AC PIR SENSOR WITH 10A RELAY

IL-TSDALISAS



THINQ

INTERLIGHT IS A BRAND BY: JACSKOOPMAN

22 PAP

INTER LIGHT

Features

- Mesh network, which has a much longer control distance, transmits received signals to neighboring devices.
- All devices on DALI line are broadcast controlled by mobile application.
- Supports our kinetic energy switches EWSDB.
- Autonomos sensor-based control
- Mesh Range over 40m at open area
- Supports sensitivity adjustment, Mesh Network, abetter method to deal with false trigger
- Recessed mounted/ Surfaced-mounted application• On-board antenna
- IP44, recommend indoor application
- 5 years warranty

Parameters

Input & Output Characteristics	
Operating voltage	220 ~240VAC 50/60Hz
Stand-by power	<0.5W
Relay	Max.10A, 400W LED

Environment Parameters	
Operation temperature	Ta: -20 ˚C ~ +50 ˚C
IP rating	IP44(Front-face)
	IP44 (With surface mount kit)


Safety & EMC	
EMC standard (EMC)	EN55015, EN61000, EN61547
Safety standard (LVD)	EN60669-1, EN60669-2-1 AS/NZS60669-1/-2-1
RED	EN300328, EN301489-1/-17
Certication	ENEC, CE , EMC, RED, RCM


Mechanical data	
Dimension	ϕ90*52mm(without surface kit)
Material	Flame-retardant/ABS
Protection Class	Class II

Sensing	
Movement detection	Typical.10m @ 3m height
Installation	Max.6m

Connectors	
Terminal block/Wire size	0.5mm² - 1.5mm² solid or stranded
Wire strip length	6-7mm


Product info



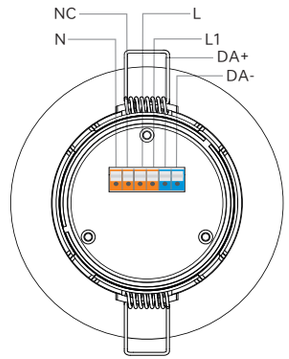


1 Magnetic reset. Using magnet close this icon over 5s. Reset successfully, LED quick flash.
2 Semi-circular detection pattern icon
3 [ ] Corridor detection pattern

Dimensions

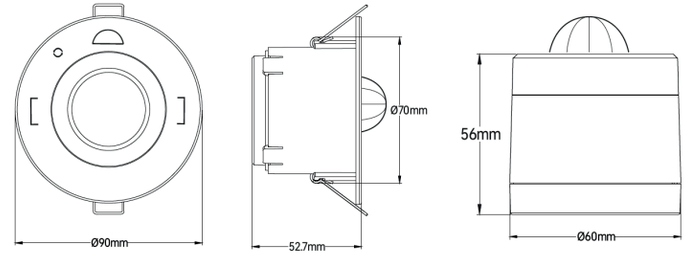


Wiring

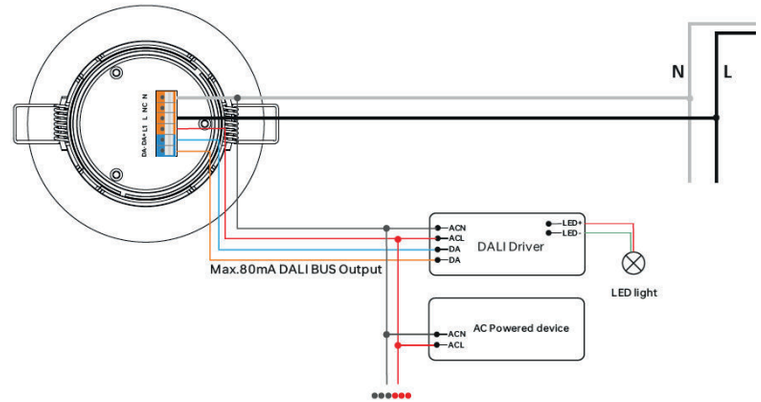


Application



1. Power up the sensor. The load should come on immediately.




2. Vacate the room or remain very still and wait for the load to switch off .



3. Enter the room or make some movement and check that the load switches on.

~~PRECAUTIONS~~

- Do not place the SENSOR near heatsources, fans or in ventilated ceiling voids.
- Do not place close to, or positioned such that, any light source points directly into the SENSOR.
- Ensure wires and cables are securely held within the connection terminals.
- Disconnect the SENSOR from the circuit before performing insulation testing of the wiring circuit.




Bend the springs up and push detector through hole in ceiling. When fully inserted the springs snap back to hold the device in place.To avoid injury, take care when bending springs.




Installation complete.

LET OP: Dit product mag alleen geïnstalleerd worden door een erkend installateur. **WARNING:** This product may only be installed by a recognized installer. **ACHTUNG:** Die Installation muss von einer elektrotechnischen Fachkraft erfolgen!


Accessory



No-Block Lens Mask
(Default)





Semi-Circular Lens Mask
(Doors)



Corridor Lens Mask

1) **No-Block** Lens Mask

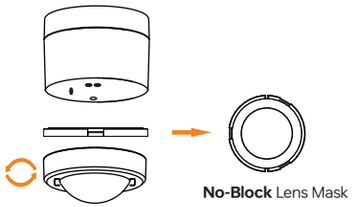


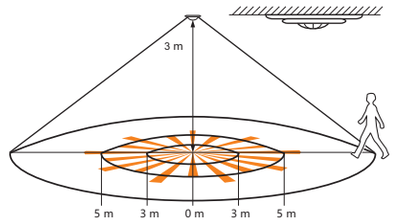


With No-Block Lens Mask: ϕ8-10m at 3m height

1. Turn the sensor cover counterclockwise and put the **No-Block Lens Mask** in.
(Default setting)

2) **Semi-Circular** Lens Mask

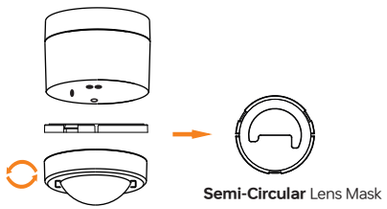


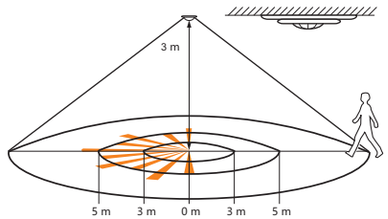


With Semi-Circular Lens Mask: Half-detection pattern

1. Turn the sensor cover counterclockwise and put the **Semi-Circular Lens Mask** in.
(Doors)

3) **Corridor** Lens Mask

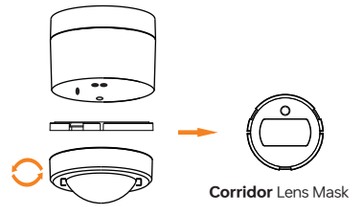

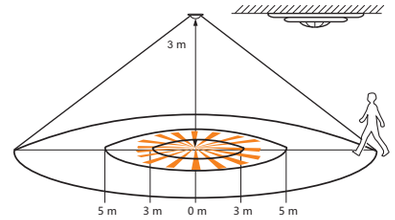

With Corridor Lens Mask: ϕ6-7m at 3m height

1. Turn the sensor cover counterclockwise and put the **Corridor Lens Mask** in.

1- Average Input Current:	< 30mA
2- Standby-power consumption:	< 0.5W
3- Power Consumption:	<1W
4- Max Tx Power:	+8dBm
5- Number of connected drivers:	Up to 64 contol gears (Broadcast control)
6- Status Indicator:	Red-Movement detection; Green-Network status
7- Detection range:	ϕ10m@3m Height @ Default sensitivity
Detection Angle:	127°
Operating Range (Light sensor):	1-1000Lx
Light Sensor Accuracy:	±20%
8- Built-in type:	IP44(Front-Face), Class III, ta 45°C, tc 55°C
9- Operating temperature:	-20°C-50°C
Storage temperature:	-25°C-60°C
Operating humidity:	0-80%(non-condensing)
10- Expected Lifetime:	More than 5 years.

LET OP: Dit product mag alleen geïnstalleerd worden door een erkend installateur.

WARNING: This product may only be installed by a recognized installer.

ACHTUNG: Die Installation muss von einer elektrotechnischen Fachkraft erfolgen!


Specifications

ENERGY SAVINGS
- Low/High-end trimming
- Daylight harvesting
- Occupancy/Vacancy detection
- Auto and advanced demand response programs
- Time-of-Day dimming schedule
- Energy monitoring


COMFORT & CONVENIENCE

Advanced occupancy detections
- Light-level stability
- Configurable dim-and-linger occupancy
- Personalized setting profile
- Work with kinetic switch keypad and dimmer wallstation
- Multi-scenes control


Direction pattern

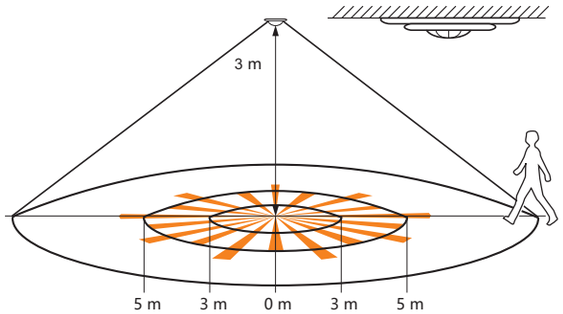

Coverage Side View

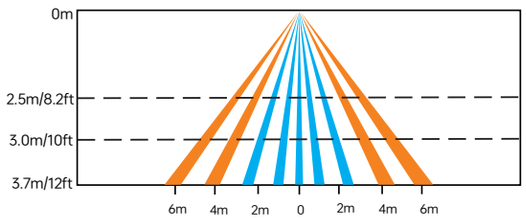

Coverage Top View



The detection area for movement can be roughly divided into two parts:

Slow movement (person moving < 1.0'/s or 0.3m/s)


Quick movement (person moving > 1.3'/s or 0.4m/s)

DETECTION RANGE

Note:

1) Following different detection areas are based on different installation heights & patterns.
2) Detection Pattern is a relevant value, the performance should depends on the site conditions (installation height/ temperature/ sunlight/humidity/ Blind area...etc)

Recommend user application

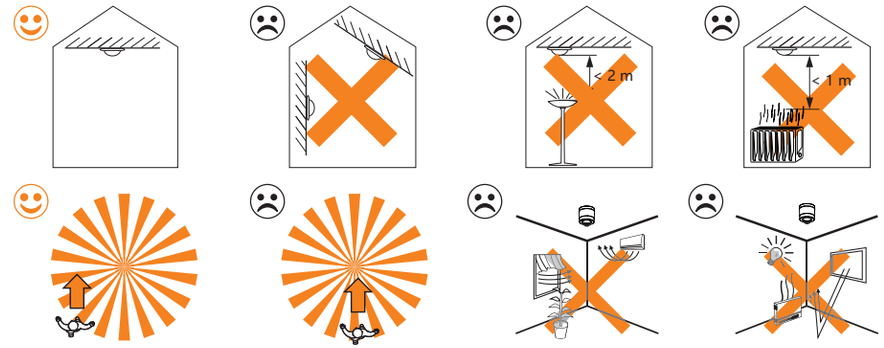

INSTALLATION PRECAUTIONS
- Avoid areas with frequent temperature changes: Keep away from air conditioners, fans, refrigerators, ovens, and other objects that cause rapid temperature changes. The detection effectiveness of PIR motion sensors is closely related to temperature fluctuations, and vents or heat sources can lead to false alarms.
- Avoid areas with significant air flow.
- Avoid facing glass doors and windows directly: 1) Do not face glass doors and windows directly to avoid interference from strong light. 2) Avoid complex environments outside doors and windows, such as direct sunlight, crowds, and moving vehicles.
- Avoid installing opposite large, constantly moving objects: Large objects with significant motion can cause sudden changes in airflow within the detection area, leading to false alarms. Outdoor PIR motion sensors should not be installed opposite large trees or tall bushes.
- Avoid areas with screens, furniture, large potted plants, or other obstacles within the detection range.
- Avoid areas exposed to direct sunlight.

Thinq app / website

THINQ
video

THINQ



LET OP: Dit product mag alleen geïnstalleerd worden door een erkend installateur.

WARNING: This product may only be installed by a recognized installer.

ACHTUNG: Die Installation muss von einer elektrotechnischen Fachkraft erfolgen!

SUNRICHER SILVAIR Work with Silvair

BLE to DALI Ceiling Mounted AC PIR

(Default) **(Doors)**


SR-SV9030D-PIR-10AD

Features


- Bluetooth to DALI sensor controller
- Bluetooth® NLC Certified
- Mesh network, which has a much longer control distance, transmits received signals to neighboring devices
  (Default setting)

mobile application

- Supports our kinetic energy switches and EnOcean switches EWSSB and EWSDB
- Autonomos sensor-based control
- Mesh Range over 40m at open area
- Supports sensitivity adjustment, Mesh Network, a better method to deal with false trigger
- Recessed mounted/ Surfaced-mounted application
- Available with Magnetic reset (touch “OPEN” on the sensor top for 5 seconds)*
- On-board antenna
- IP44, recommend indoor application
  (Doors)







* With Recessed-Mounted Kit
(Optional for order)

Parameters

Input & Output Characteristics	
Operating voltage	220 ~240VAC 50/60Hz
Stand-by power	<0.5W
Relay	Max.10A, 400W LED

Environment Parameters	
Operation temperature	Ta: -20 ˚C ~ +50 ˚C
IP rating	IP44(Front-face)
	IP44 (With surface mount kit)

Safety & EMC	
EMC standard (EMC)	EN55015, EN61000, EN61547
Safety standard (LVD)	EN60669-1, EN60669-2-1 AS/NZS60669-1/-2-1
RED	EN300328, EN301489-1/-17
Certication	ENEC, CE , EMC, RED, RCM

Mechanical Data	
Dimension	ϕ90*52mm(without surface kit)
Material	Flame-retardant/ABS
Protection Class	Class II

Sensing	
Movement detection	Typical 10m @ 3m height

Connectors	
Terminal block/Wire size	0.5mm² - 1.5mm²

1- Average Input Current: < 30mA
2- Standby-power consumption: < 0.5W
3- Power Consumption: <1W
4- Max Tx Power: +8dBm
5- Number of connected drivers: Up to 64 contol gears (Broadcast control)
6- Status Indicator: Red-Movement detection; Green-Network status
7- Detection range: ϕ10m@3m Height @ Default sensitivity
   Detection Angle: 127°
   Operating Range (Light sensor): 1-1000Lx
   Light Sensor Accuracy: ±20%
8- Built-in type: IP44(Front-Face), Class III, ta 45°C, tc 55°C
9- Operating temperature: -20°C-50°C
   Storage temperature: -25°C-60°C
   Operating humidity: 0-80%(non-condensing)
10- Expected Lifetime: More than 5 years.

LET OP: Dit product mag alleen geïnstalleerd worden door een erkend installateur. **WARNING:** This product may only be installed by a recognized installer. **ACHTUNG:** Die Installation muss von einer elektrotechnischen Fachkraft erfolgen!

Specifications

ENERGY SAVINGS
- Low/High-end trimming
- Daylight harvesting
- Occupancy/Vacancy detection
- Auto and advanced demand response programs
- Time-of-Day dimming schedule
- Energy monitoring

COMFORT & CONVENIENCE

Advanced occupancy detections
- Light-level stability
- Configurable dim-and-linger occupancy
- Personalized setting profile
- Work with kinetic switch keypad and dimmer wallstation
- Multi-scenes control

Direction pattern


Technology Partner

SILVAIR Work with Silvair

LI Ceiling Mounted AC PIR
ith 10A Relay
SR-SV9030D-PIR-10AD

Features

- Bluetooth to DALI sensor controller
- Bluetooth® NLC Certified
- Mesh network, which has a much longer control distance, transmits received signals to neighboring



DETECTION RANGE

Note:

1) Following different detection areas are based on different installation heights & patterns.
2) Detection Pattern is a relevant value, the performance should depends on the site conditions (installation height/ temperature/ sunlight/humidity/ Blind area...etc)

Recommend user application

Relay	Max.10A, 400W LED

	IP44 (With surface mount kit)

Safety & EMC	
EMC standard (EMC)	EN55015, EN61000, EN61547
Safety standard (LVD)	EN60669-1, EN60669-2-1 AS/NZS60669-1/-2-1
RED	EN300328, EN301489-1/-17
Certication	ENEC, CE , EMC, RED, RCM

Mechanical Data	
Dimension	ϕ90*52mm(without surface kit)
Material	Flame-retardant/ABS
Protection Class	Class II

Sensing	
Movement detection	Typical.10m @ 3m height
Installation	Max.6m

Connectors	
Terminal block/Wire size	0.5mm² - 1.5mm² solid or stranded
Wire strip length	6-7mm

Product info

INSTALLATION PRECAUTIONS
- Avoid areas with frequent temperature changes: Keep away from air conditioners, fans, refrigerators, ovens, and other objects that cause rapid temperature changes. The detection effectiveness of PIR motion sensors is closely related to temperature fluctuations, and vents or heat sources can lead to false alarms.
- Avoid areas with significant air flow.
- Avoid facing glass doors and windows directly: 1) Do not face glass doors and windows directly to avoid interference from strong light. 2) Avoid complex environments outside doors and windows, such as direct sunlight, crowds, and moving vehicles.
- Avoid installing opposite large, constantly moving objects: Large objects with significant motion can cause sudden changes in airflow within the detection area, leading to false alarms. Outdoor PIR motion sensors should not be installed opposite large trees or tall bushes.
- Avoid areas with screens, furniture, large potted plants, or other obstacles within the detection range.
- Avoid areas exposed to direct sunlight.

Thinq app / website

THINQ

THINQ video

THINQ



LET OP: Dit product mag alleen geïnstalleerd worden door een erkend installateur. **WARNING:** This product may only be installed by a recognized installer. **ACHTUNG:** Die Installation muss von einer elektrotechnischen Fachkraft erfolgen!