



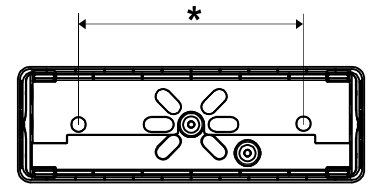


IL-ENT1W

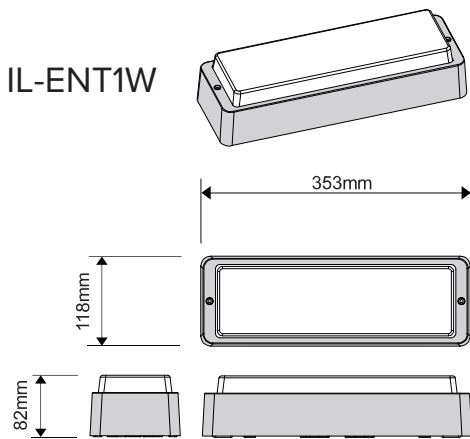


	L	W	H	*
IL-ENT1W	353	118	82	230

Unit:mm



! WARNING


- 1) Switch off the power supply before installation
- 2) Installation should be done by registered electricians





X2PCS




X2PCS




NOT INCLUDED




1. Take out off the diffuser

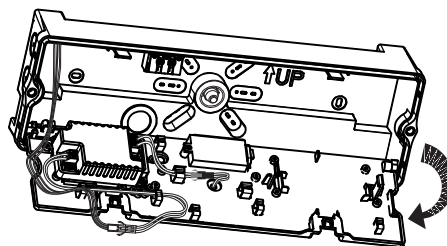


2. Open the plastic holder

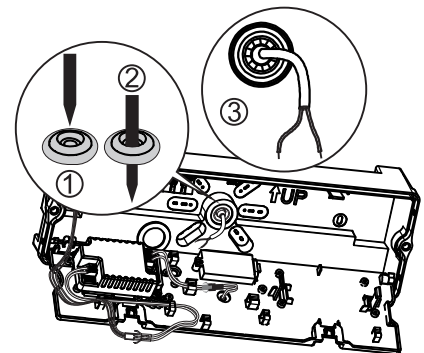


3. Insert the cable through rubber block

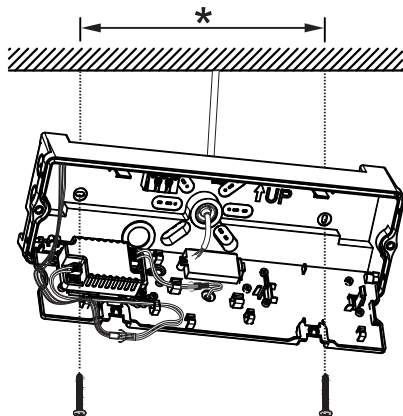


4. Fix the base on the wall

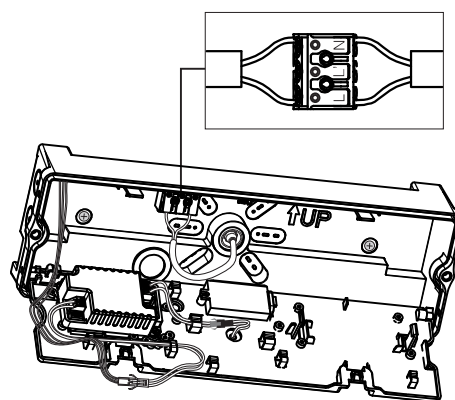


5. Connect the wires, L to L, N to N

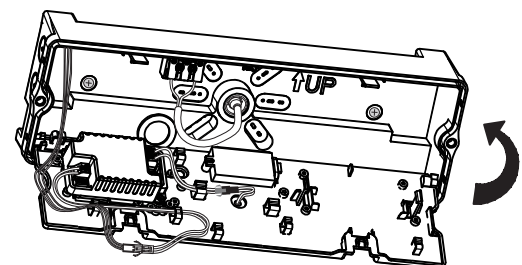


6. Put back the LED module

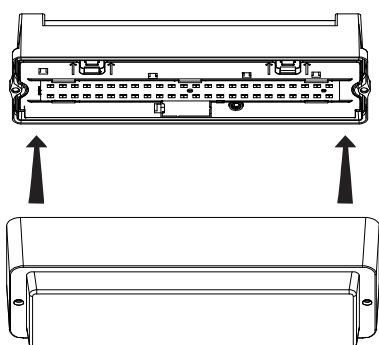

7. Put back the diffuser

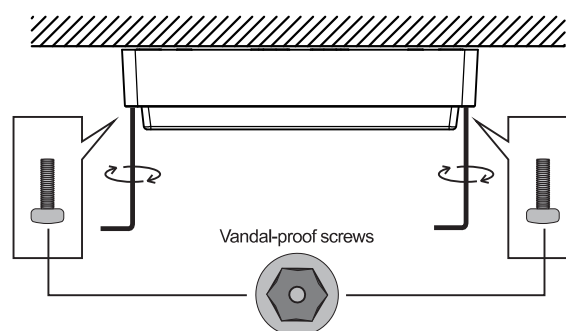

8.Tighten the screws

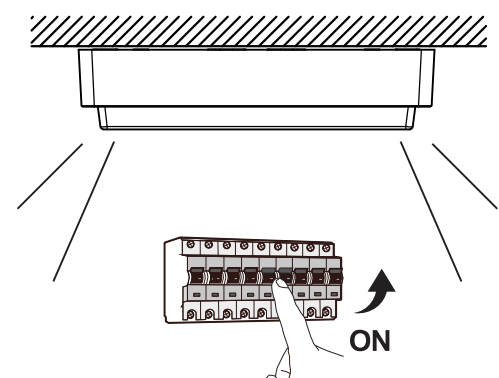

9.Switch on the power supply

NL

Schakel de stroomtoevoer uit voordat u met de installatie begint.

Verwijder de diffuser.

Open de plastic houder met leds.

Steek de kabel door het rubberen blok.

Bevestig de basis aan de muur.

Sluit de draden L op L en N op N aan. Stel de gewenste lichtkleur en wattage in via de dipswitch.

Plaats de plastic houder met leds terug.

Plaats de diffuser terug.

Draai de schroeven vast.

Schakel de stroomtoevoer in.

EN

Turn off the power supply before installation.

Take off the diffuser

Open the plastic holder with leds

Insert the cable true the rubber block

Fix the base on the wall

Connect the wires L to L, N to N. Set desired light color and watt age via dipswitch.

Put back the plastic holder with leds

Put back the diffuser

Tighten the screws

Switch on the power energy

DE

Schalten Sie vor der Installation die Stromversorgung aus.

Nehmen Sie den Diffusor ab.

Öffnen Sie die Kunststoffhalterung mit LEDs.

Führen Sie das Kabel durch den Gummiblock ein.

Befestigen Sie die Basis an der Wand.

Verbinden Sie die Drähte L mit L und N mit N. Stellen Sie die gewünschte Lichtfarbe und Wattzahl über den DIP-Schalter ein.

Setzen Sie die Kunststoffhalterung mit LEDs wieder ein.

Setzen Sie den Diffusor wieder ein.

Ziehen Sie die Schrauben fest.


Schalten Sie die Stromversorgung ein.

LUMENOUTPUT | IL-ENT1W


	3.000K	3.500K	4.000K
5.5W	580	660	610
7W	740	840	770
8.5W	900	1.020	940
10W	1.050	1.200	1.100

Installation of sensor


1-1) Remove the plastic component

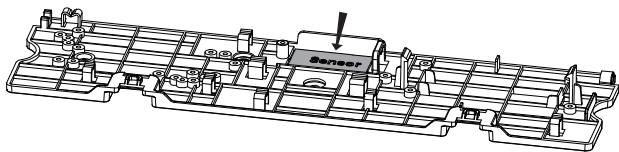


1-3) Install the sensor

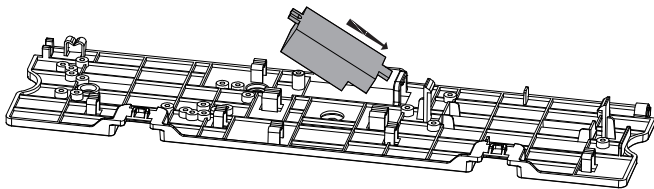


1-5) Fix the sensor with a screw

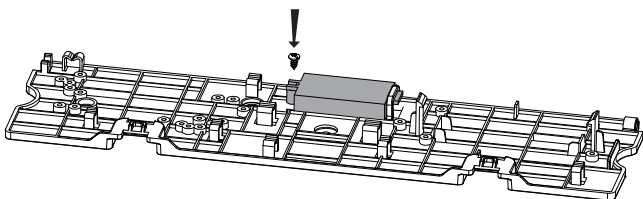


1-7) Connect the wire to the connector

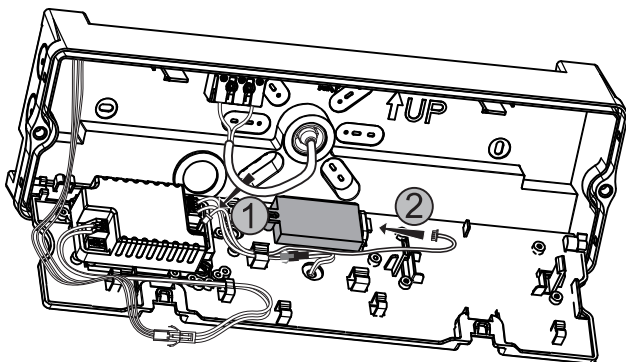


1-2) Remove the plastic component

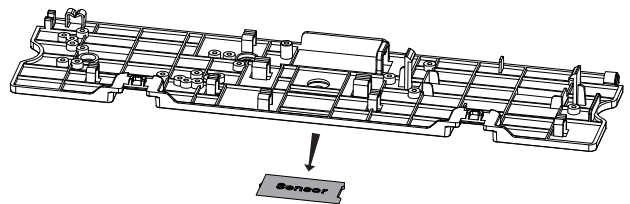




1-4) Install the sensor

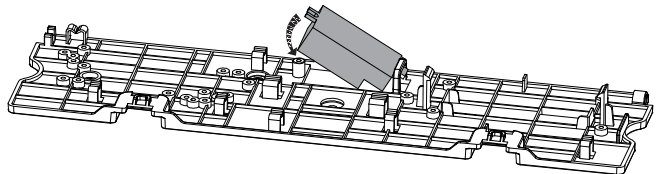

1-6) Fix the sensor with a screw

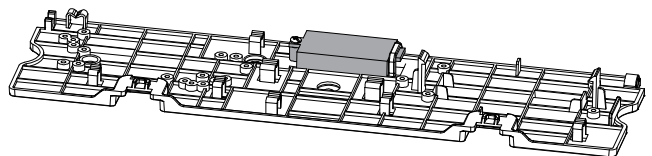

1-8) Finish installation

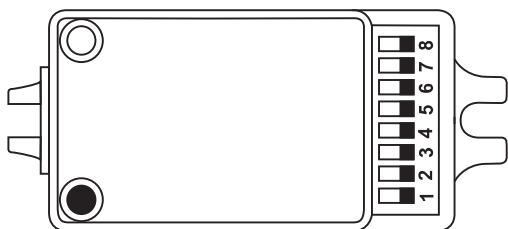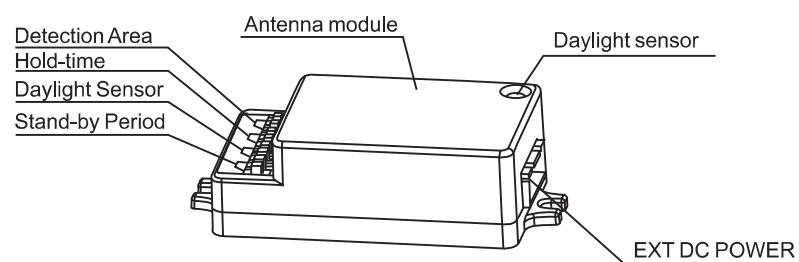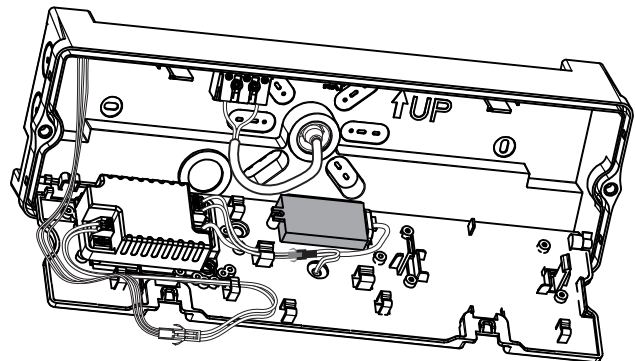

Dip switch setting

Detection Area				Hold Time			Daylight Sensor				Operating Mode					
	1	2			3	4			5	6			7	8		
I	ON	ON	100%		ON	ON	5S	I	ON	ON	+∞		I	ON	ON	0S
II	-	ON	75%		-	ON	90S	II	-	ON	50Lux		II	-	ON	30S
III	ON	-	50%		ON	-	3min	III	ON	-	15Lux		III	ON	-	10min
IV	-	-	25%		-	-	10min	IV	-	-	5Lux		IV	-	-	+∞


ON

Factory Setting


Detection Area: 100%, Hold Time:5S ,Stand-by period:0S , Stand-by dim level:20%, Daylight sensor: Disable

Installation of Emergency


2-1) Install the emergency

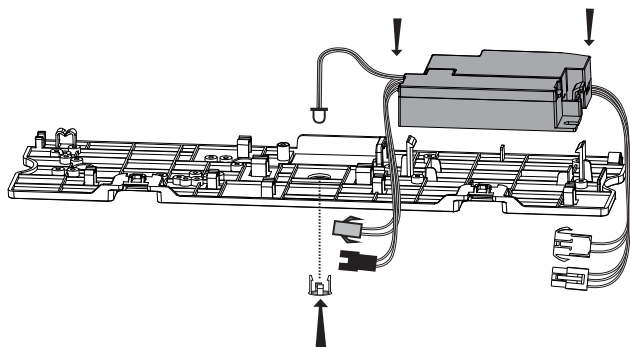


2-2) Install the indicator light

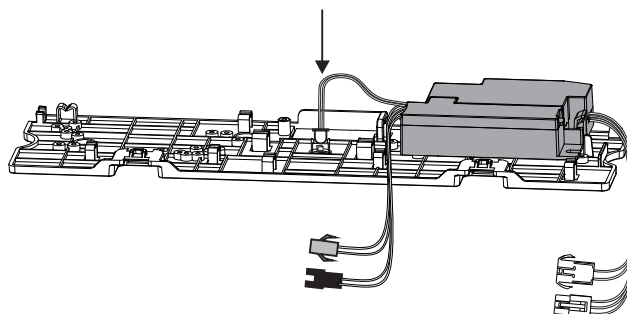


2-3) Install the emergency

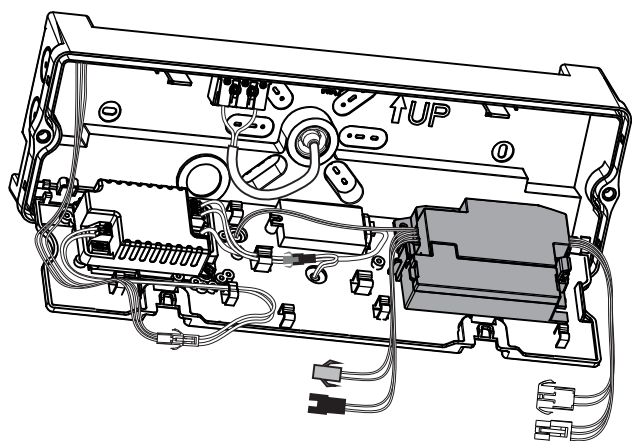

2-4) Disconnect the connector

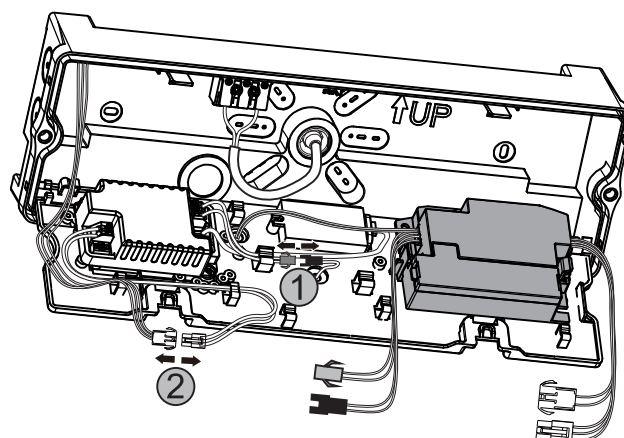

2-5) Connect the connector

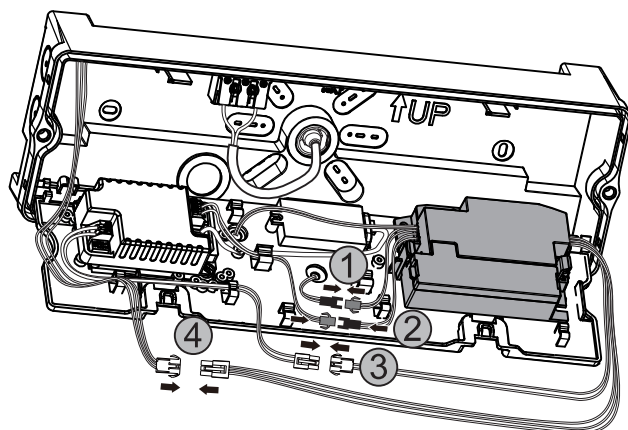

2-6) Finish installation

