





PRODUCT DATASHEET | IL-SKY02
ACTIVE SKY LED PANEL 1200X1200X100MM 6500K CLOUDS AND TREES



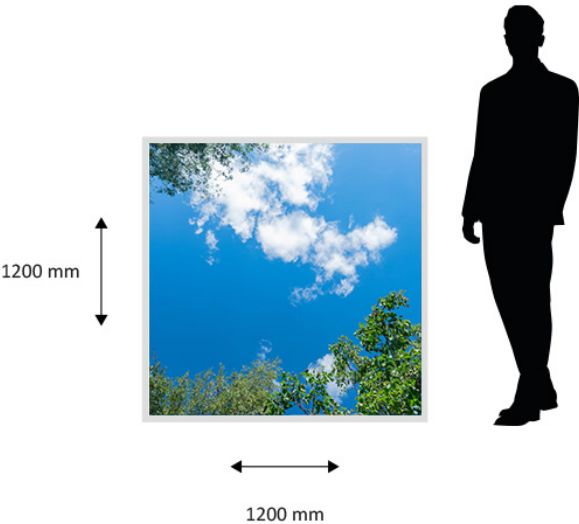

DESCRIPTION

With the Active Sky LED panels, you bring the outdoors inside. Imagine yourself on a tropical beach, under a beautiful cloudy sky or in the forest, it's possible! The panels are no less than 120x120cm in size, for a calm and spacious effect. The panels are delivered complete, so you don't have to mess around with adhesive film yourself. Ideal for places with little daylight, but also a nice eye-catcher for the office, hospital, school or daycare.
Delivery time and shipping costs by arrangement.

6500K COOL	30 WATT	2850 LUMEN	50.000 HOURS
PF 0.9	VAC 230		



SPECIFICATIONS

Brand:	Interlight
Product type:	Panel
Suitable for wall mounting:	No
Suitable for ceiling mounting:	Yes
Suitable for pendulum suspension:	No
Suitable for flush mounting:	Yes
Suitable for surface mounting:	No
Suitable for light line configuration:	No
Suitable for monitor workplace according to EN 12464-1:	Yes
Lamp type:	LED not interchangeable
With light source:	Yes
Suitable for number of light sources:	1
Lampholder:	Other
Housing material:	Plastic
Surface protection housing:	Plasticized
Housing color:	White
Material cover:	Other
Grid version:	No
Voltage type:	AC
Nom. voltage :	230 V
Ballast:	LED control current-controlled
Driver included:	Yes
Not dimmable:	Yes
Dimming dependent on driver:	Yes
Light distributor:	Diffuser lens/optics/panel
Light distribution:	Symmetrical
Beam angle:	>80° - Extremely wide beam
Light outlet:	Direct



Energy efficiency class of the built-in lamp:	A++, A+, A (LED)
Rated life time L70/B10 at 25 °C:	50000 h
Degree of protection (IP):	IP20
Impact resistance:	IK02
Protection class according to IEC 61140:	II
Nom. ambient temperature according to IEC62722-2-1 :	-10 - 40 °C
Specific luminous flux luminaire:	106 lm/W
Effective luminous flux according to IEC 62722-2-1:	3200 lm
Light color according to EN 12464-1:	Daylight white > 5300 K
Suitable for lamp power:	30 W
Max system power:	30 W
Light color:	White
Color temperature:	6500 K
Power factor:	0.9
Width:	1200 mm
Height/depth:	100 mm
Length:	1200 mm
Type of wiring:	End
Number of poles:	2
Connection method:	Plug clamp

DOWNLOADS AVAILABLE FROM WEBSITE

Certificates

Manual