




PRODUCT DATASHEET | LS20.00PRO4

BLUETOOTH LIGHT, TEMPERATURE AND HUMIDITY SENSOR WCD

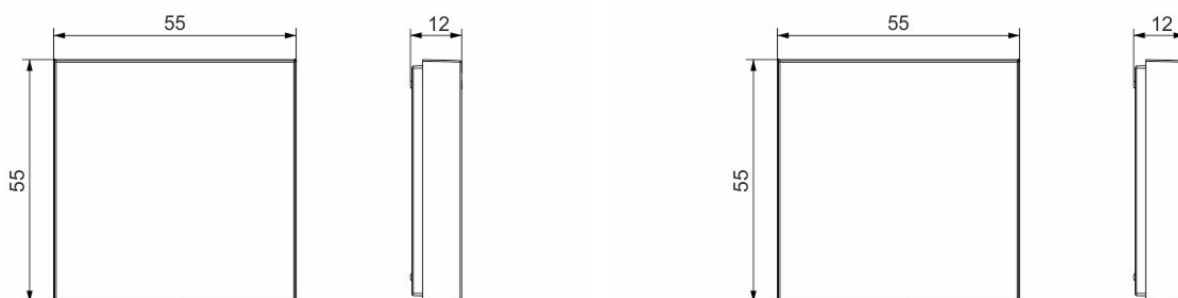

DESCRIPTION

Surface mounted bluetooth light, brightness, temperature, and humidity sensor for mi.puck. Can only be used in connection with an EA46.22PRO4 or EA16.11PRO4.

Recording of light value, temperature, and relative humidity. Small compact size.

Various modes of mounting:

- Mounted to the window with a suction cup for use as a light sensor (supplied)
- Wall-mounted
- Built-in to the switch program 55 x 55 mm with mounting plate 200.001
- Outdoor mounting with mounting hook 200.002

Using mi.puck products, you can easily control, regulate and automate numerous applications in your home through the free mi.puck app, using a cell phone or tablet.

The mi.puck app is available for Apple and Android devices.



SPECIFICATIONS

Brand:	Hugo muller
Product type:	Sensor
Mounting method:	Other
Supply voltage:	230 V
Power supply voltage type:	AC
Frequency supply voltage:	50 - 60 Hz
Autonomy in years:	10
Text guidance in the display:	No

DOWNLOADS AVAILABLE FROM WEBSITE

Datasheet
Manual