




PRODUCT DATASHEET | IL-BH6P
BULKHEAD LED 6W 3,000/4,000/5,000K WHITE/GRAY POLYCARBONATE IP54



L	W	H	F
175	117	103	103

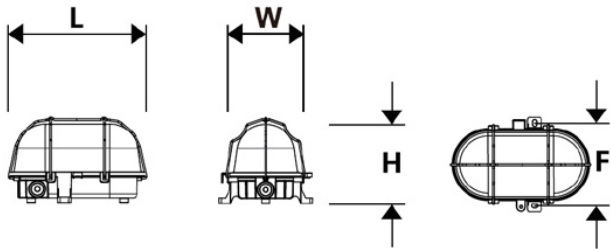



DESCRIPTION

This white/gray Bulkhead LED bulb from Interlight is a convenient choice for easy and quick installation. Thanks to its LED technology , it is also energy efficient. With a maximum light output of 720 lumens and a wattage of 6 W, it achieves an efficiency of 120 lumens per watt. The lamp offers a bright light that can be set to 3,000, 4,000 or 5,000 Kelvin as desired, allowing you to adjust the atmosphere to suit your needs. With an IP54 rating, the lamp is protected from dust and splashing water from any angle, making perfect for outdoor use. This Bulkhead comes with mounting and connection accessories, making installation even easier. With all these features, it is an ideal choice for both residential and commercial use.

3000K 4000K 5000K	660~ 720 LUMEN	8 WATT	CRI >80
	PF 0.5	IP 54	IK 08
50.000 HR			



SPECIFICATIONS

Brand:	Interlight
Product type:	IP54
Suitable for wall mounting:	Yes
Suitable for pendulum suspension:	No
Suitable for ceiling mounting:	Yes
Suitable for flush mounting:	No
Suitable for surface mounting:	Yes
Suitable for light line configuration:	No
Suitable for monitor workplace according to EN 12464-1:	No
Lamp type:	LED not interchangeable
Suitable for number of light sources:	1
Housing material:	Plastic
Surface protection housing:	Untreated
Housing color:	Gray
Material cover:	Plastic opal
Grid version:	No
Voltage type:	AC
Nom. voltage :	220 - 240 V
Ballast:	LED control current-controlled
Driver included:	Yes
Not dimmable:	Yes
Light distributor:	Diffuser lens/optics/panel
Light distribution:	Symmetrical
Beam angle:	41-80° - Broadcast
Color consistency (McAdam ellipse):	SDCM5
Light outlet:	Direct
Nom. life L80/B10 at 25 °C :	50000 h
Degree of protection front (IP):	IP53



Degree of protection (IP):	IP54
Impact resistance:	IK08
Protection class according to IEC 61140:	II
Emergency power supply integrated:	No
Nom. ambient temperature according to IEC62722-2-1 :	-20 - 40 °C
Suitable for emergency lighting:	No
With motion sensor:	No
Specific luminous flux luminaire:	115 lm/W
Effective luminous flux according to IEC 62722-2-1:	720 lm
With light sensor:	No
Cover fixture with thermal insulation material possible:	No
With air slots:	No
Light color according to EN 12464-1:	Neutral white 3300 - 5300 K
Suitable for lamp power:	6 W
Max system power:	6 W
Light color:	White
Color temperature:	3000 - 5000 K
Color rendering index:	80-89
Power factor:	0.5
Width:	117 mm
Height/depth:	103 mm
Length:	175 mm
Type of wiring:	End
Number of poles:	2
Connection method:	Plug clamp
Light color adjustable:	Stands
Luminous flux adjustable:	No
Beam angle adjustable:	No



DOWNLOADS AVAILABLE FROM WEBSITE

Manual
