




PRODUCT DATASHEET | IL-CB4K27M

CABILED LED DOWNLIGHT 4W Ø65MM 2,700K BRUSHED CHROME IP44



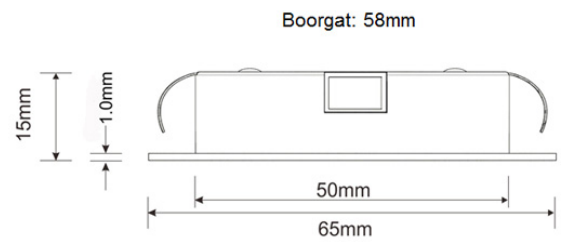

DESCRIPTION

Cabiled spotlights are perfect for use in cabinets and kitchens. They are only 15mm high and therefore easy to build in. For where this is not possible, surface-mounted rings are available. The spotlights and surface-mounted rings are available in white and brushed chrome. The spotlights feature a warm white (2,700K) LED. Thanks to the Camita lens, a nice even light image is created. Is it too much or do you want to create a little more atmosphere? No problem, the spotlights are perfectly dimmable! The Interlight Cabiled spotlights bring light to the most impossible places, let your kitchen, your dishes, your books shine! NOTE: This spotlight comes without a driver. Do you need only one Cabiled? Then choose this loose spot and the IL-CB13D driver which can be found in the accessories. Would you like to use more spots? Then choose the IL-CBSET basic set. This basic set contains 2 spots and a driver, which can be expanded with 2 separate spots to a total of 4 spots per driver.

2700K WARM	4 WATT	260 LUMEN	 36°
PF >0.85	CRI 92	IP 44	UGR <10
		NO DRIVER INCLUDED	50.000 HOURS



SPECIFICATIONS

Brand:	Interlight
Product type:	Downlight
Suitable for surface mounting:	Yes
Suitable for flush mounting:	Yes
Suitable for wall mounting:	No
Suitable for pendulum suspension:	No
Suitable for ceiling mounting:	Yes
Suitable for truss mounting:	No
Suitable for pedestal/floor mounting:	No
Suitable for power rail mounting:	No
Suitable for clamp mounting:	No
Suitable for low voltage cable system:	No
Adjustability:	Not adjustable
With motion sensor:	No
With light sensor:	No
Lamp type:	LED not interchangeable
With light source:	Yes
Suitable for number of light sources:	1
Lampholder:	Other
Housing material:	Aluminum
Surface protection:	Lacquered
Housing color:	Stainless steel (stainless steel)
Material cover:	Plastic transparent
Surface brushed:	Yes
Voltage type:	AC
Nom. voltage :	22 V
Ballast:	LED control current-controlled
Driver included:	No



Dimmable:	Yes
Interchangeable ballasts:	Yes
Dimmable phase cut:	Yes
Dimmable phase cut:	Yes
Reflector:	Other
Light distributor:	Diffuser lens/optics/panel
Light distribution:	Symmetrical
Beam angle:	21-40° - Medium radiant
Light outlet:	Direct
Energy efficiency class:	A+
Energy efficiency class of the built-in lamp:	A+
Nom. life L80/B10 at 25 °C :	50000 h
Degree of protection (IP):	IP44
Degree of protection (NEMA).:	4
Impact resistance:	IK02
Protection class according to IEC 61140:	II
Nom. ambient temperature according to IEC62722-2-1 :	-10 - 40 °C
Suitable for lamp power:	4 W
Max system power:	4 W
Luminous flux:	260 lm
Effective luminous flux according to IEC 62722-2-1:	
Specific luminous flux lamp:	65 lm/W
Light color:	White
Color temperature:	2700 K
Color rendering index:	90-100
Power factor:	0.85
Installation diameter:	
Length:	65 mm
Width:	65 mm



Height/depth:	15 mm
Outer diameter:	65 mm
Type of wiring:	End
Number of poles:	2
Connection method:	Plug clamp
Specific luminous flux luminaire:	65 lm/W
Glow wire test according to IEC 60695-2-11:	650 °C - 30 s



ACCESSORIES

Article	Description
IL-CB13D	Cabiled led driver dimmable 150mA/230V
IL-CBSKM	Cabiled surface-mounted ring brushed chrome
IL-CBSET27M	Cabiled led downlight 4W Ø65mm 2.700K brushed chrome IP44 2pcs incl.driver

DOWNLOADS AVAILABLE FROM WEBSITE

Circuitbreaker
Dimtest
LDT-File
Manual