




PRODUCT DATASHEET | PWCEEQW316

CEE QUICK CONNECT SURFACE-MOUNTED SOCKET OUTLET 3-POLE 16A IP44 BLUE

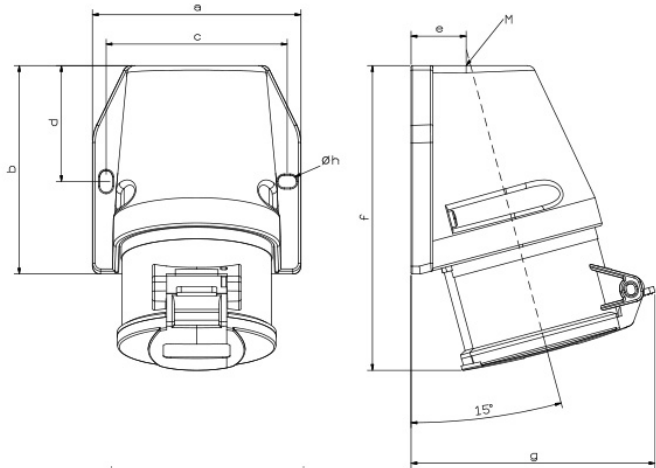

a	75	e	20
b	80	f	121
c	64	g	88
d	43	Øh	5,3
		M	M20x1,5





DESCRIPTION

The 3x16A CEE surface-mounted socket outlet is designed for professional applications where ease of installation and reliability are key. With a capacity of 16A, suitable for 200-250V (50-60 Hz) and performed in 3-pole (2P + E), this model offers a safe and efficient solution for a variety of installations. The integrated Quick Connection system ensures that each connection is made quickly, safely and consistently. **The benefits of Quick Connection**

- Faster installation: less assembly time per connection
- Reliable and constant contact pressure: optimum electrical conduction
- Less chance of installation errors: simple and clear connection process
- Lower assembly costs: working faster means immediate cost savings
- Easy to maintain: quick and easy to disconnect

The robust PA6 housing, durable brass contacts (CuZn) and IP44 protection guarantee reliable operation within a temperature range of -25°C to +80°C. An efficient and durable solution for professional installations where reliability is paramount.



SPECIFICATIONS

Brand:	Power
Product type:	CEE wall outlet
Mounting method:	Construction
IEC current:	16 A
Number of poles:	3
Voltage according to EN 60309-2:	200-250 V (50+60 Hz) blue
Hours:	6 h
Feature color:	Blue
Housing color:	Other
Degree of protection (IP):	IP44
Connection technology:	Screwless clamp
Cable Entry:	Screw gland
Material:	Plastic
Contact Equipment:	CuZn
Surface treatment contacts:	Galvanized
Attachment method:	Exterior mount



ACCESSORIES

Article	Description
PWCEES316	CEE plug 3-pole 16A IP44 blue

DOWNLOADS AVAILABLE FROM WEBSITE

Manual
RoHS certificate