





PRODUCT DATASHEET | PWCEEQW516

CEE QUICK CONNECT SURFACE-MOUNTED SOCKET OUTLET 5-POLE 16A IP44 RED



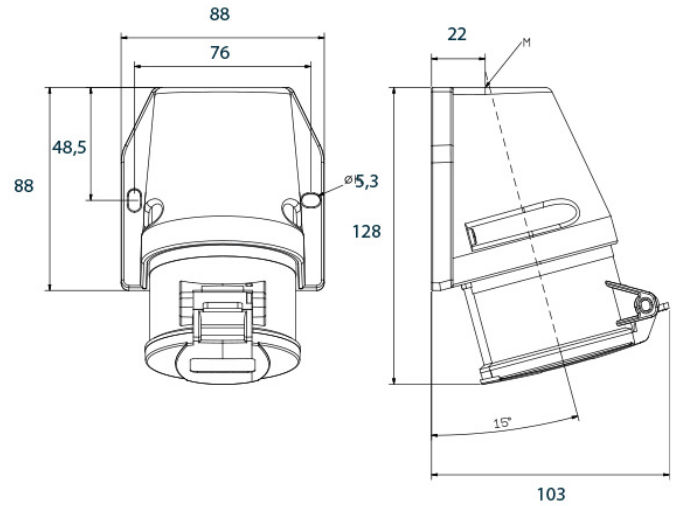

DESCRIPTION

The 5x16A CEE surface mount socket combines safety, durability and installation speed in one reliable solution. With an output of 16A, suitable for 380-415V (50-60 Hz) and designed in 5-pole (3P + N + E), this model is ideal for professional industrial applications. Thanks to the clever Quick Connection system, you work faster, more efficiently and with less chance of error than with traditional screw connections. **The benefits of Quick Connection**

- Faster installation: less assembly time per connection
- Reliable and constant contact pressure: optimum electrical conduction
- Less chance of installation errors: simple and clear connection process
- Lower assembly costs: working faster means immediate cost savings
- Easy to maintain: quick and easy to disconnect

The rugged PA6 housing, high-quality brass contacts (CuZn) and IP44 protection ensure long-lasting and safe performance at temperatures from -25°C to +80°C. The reliable choice for installers who want to combine efficiency and quality.



SPECIFICATIONS

Brand:	Power
Product type:	CEE wall outlet
Mounting method:	Construction
IEC current:	16 A
Number of poles:	5
Voltage according to EN 60309-2:	380-415 V (50+60 Hz) red
Hours:	6 h
Feature color:	Red
Housing color:	Other
Degree of protection (IP):	IP44
Connection technology:	Screwless clamp
Cable Entry:	Screw gland
Material:	Plastic
Contact Equipment:	CuZn
Surface treatment contacts:	Galvanized
Attachment method:	Exterior mount



ACCESSORIES

Article	Description
PWCEES516	CEE plug 5-pole 16A IP44 red

DOWNLOADS AVAILABLE FROM WEBSITE

Manual
RoHS certificate