




PRODUCT DATASHEET | PWCEEQW532

CEE QUICK CONNECT SURFACE-MOUNTED SOCKET OUTLET 5-POLE 32A IP44 RED

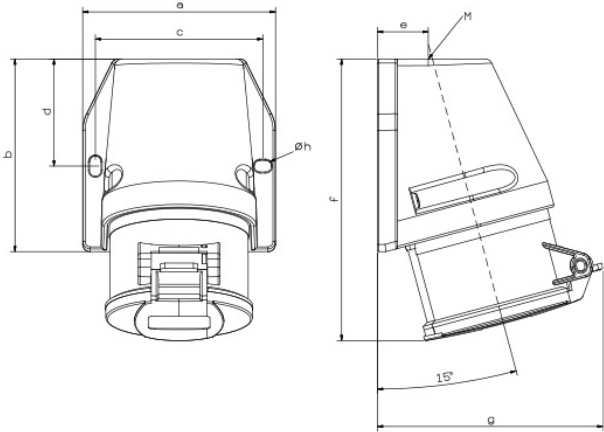

a	96	e	26
b	102	f	152
c	84	g	113
d	56	Øh	5,3
		M	M32x1,5





DESCRIPTION

The 5x32A CEE surface-mounted socket is designed for industrial environments where reliability is not an option but a requirement. With a capacity of 32A, suitable for 380-415V (50-60 Hz) and executed in 5-pole (3P + N + E), this model is perfect for heavier applications in industry, construction and utilities. The integrated Quick Connection system takes ease of installation to the next level and ensures maximum efficiency on the shop floor. **The benefits of Quick Connection**

- Faster installation: less assembly time per connection
- Reliable and constant contact pressure: optimum electrical conduction
- Less chance of installation errors: simple and clear connection process
- Lower assembly costs: working faster means immediate cost savings
- Easy to maintain: quick and easy to disconnect

The robust PA6 housing, durable brass contacts (CuZn) and IP44 protection guarantee reliable performance within a temperature range of -25°C to +80°C. A powerful and efficient solution for professional installations where performance counts.



SPECIFICATIONS

Brand:	Power
Product type:	CEE wall outlet
Mounting method:	Construction
IEC current:	32 A
Number of poles:	5
Voltage according to EN 60309-2:	380-415 V (50+60 Hz) red
Hours:	6 h
Feature color:	Red
Housing color:	Other
Degree of protection (IP):	IP44
Connection technology:	Screwless clamp
Cable Entry:	Screw gland
Material:	Plastic
Contact Equipment:	CuZn
Surface treatment contacts:	Galvanized
Attachment method:	Exterior mount



ACCESSORIES

Article	Description
PWCEES532	CEE plug 5-pole 32A IP44 red

DOWNLOADS AVAILABLE FROM WEBSITE

Manual
RoHS certificate