




PRODUCT DATASHEET | IL-X4D20PO3  
DRIVER LED 20W 500MA/230V NON DIMMABLE + 3 POLES FOR GST18I3



| Specification item          | Value | Unit |
|-----------------------------|-------|------|
| Length (A1)                 | 118   | mm   |
| Mounting hole distance (A2) | 108   | mm   |
| Width (B1)                  | 42    | mm   |
| Width (B2)                  | 32.5  | mm   |
| Height (C1)                 | 28    | mm   |
| Mounting hole diameter (D1) | 4.2   | mm   |
| Weight                      | 75    | gram |

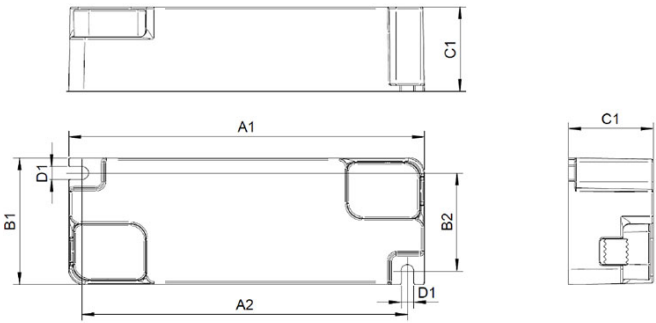



## DESCRIPTION

Designed specifically for LED modules and panels, this non-dimmable constant current driver operates at an input voltage of 220-240 Vac. The driver provides a stable and reliable power supply, ensuring consistent lighting performance and longer life of the connected lights. The practical push-fit terminals allow quick and easy installation without the use of additional tools. This significantly reduces installation time and makes the driver particularly suitable for projects where efficiency is key. In addition, the connectors feature a mechanical strain relief with a clip-on end cap, providing additional safety and secure attachment of the wiring. The IL-X4D driver is characterized by a low flicker rate of less than 4%, which contributes to a comfortable and stable light display. In addition, the driver is ENEC-certified, which guarantees compliance with strict European safety and quality standards. Furthermore, the driver features a spacious enclosure with ample wiring space, making connection even easier and providing flexibility during installation.



**Dit artikel wordt op bestelling bij ons geassembleerd, de levertijd is daarom binnen 48 uur.**



## SPECIFICATIONS

|                                                                |                  |
|----------------------------------------------------------------|------------------|
| <b>Brand:</b>                                                  | Interlight       |
| <b>Product type:</b>                                           | On/off with cord |
| <b>Dimmable:</b>                                               | No               |
| <b>Constant luminous flux control:</b>                         | Yes              |
| <b>Housing:</b>                                                | Plastic housing  |
| <b>Suitable for outdoor use:</b>                               | No               |
| <b>DIN rail mounting:</b>                                      | No               |
| <b>Suitable for constant current:</b>                          | Yes              |
| <b>Suitable for constant voltage:</b>                          | Yes              |
| <b>Output voltage:</b>                                         | 30 - 40 V        |
| <b>Output Current:</b>                                         | 500 mA           |
| <b>Suitable for direct voltage (primary side):</b>             | No               |
| <b>Output power:</b>                                           | 20 W             |
| <b>Input voltage:</b>                                          | 220 - 240 V      |
| <b>Power Consumption:</b>                                      | 20 W             |
| <b>Frequency input voltage:</b>                                | 50 - 60 Hz       |
| <b>Efficiency:</b>                                             | 98.5 %           |
| <b>Schokbestendigheid (gewone modus, L/N-aarde):</b>           | 2 kV             |
| <b>Schokbestendigheid (differentiële modus, L-N):</b>          | 1 kV             |
| <b>Overload protection:</b>                                    | Yes              |
| <b>Emergency power supply system:</b>                          | No               |
| <b>Overtemperature protection:</b>                             | Yes              |
| <b>Ambient temperature:</b>                                    | -20 - 40 °C      |
| <b>Short circuit protection:</b>                               | Yes              |
| <b>Max. number of fixtures per line protection switch B16:</b> | 45               |
| <b>Max. number of fixtures per line protection switch C16:</b> | 45               |
| <b>Degree of protection (IP):</b>                              | IP20             |



|                                          |         |
|------------------------------------------|---------|
| Protection class according to IEC 61140: | II      |
| Operating device life:                   | 50000 h |
| Length:                                  | 118 mm  |
| Width:                                   | 42 mm   |
| Height:                                  | 28 mm   |

DOWNLOADS AVAILABLE FROM WEBSITE

|                  |
|------------------|
| Datasheet        |
| ENEC certificate |