




PRODUCT DATASHEET | IL-DC9D
DRIVER LED DIP SWITCH 120 TO 220MA DIMMABLE



Voltage			Dipswitch		
Voltage	Current	Power	1	2	3
30-38V	120mA	4.6W	-	-	-
	140mA	5.3W	-	-	ON
	160mA	6.1W	-	ON	ON
	180mA	6.8W	ON	-	-
	200mA	7.6W	ON	ON	-
	220mA	8.4W	ON	ON	ON

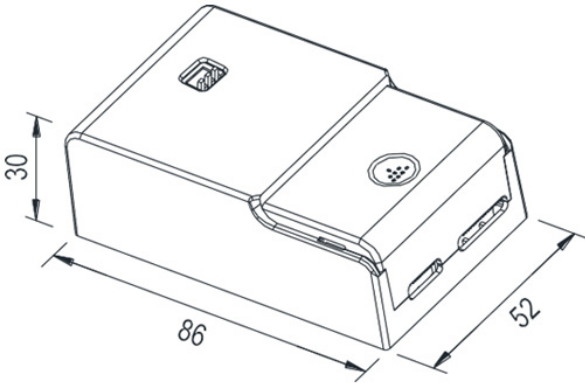

DESCRIPTION

The IL-DC9D driver is designed for phase-cut dimming. These LED drivers provide constant current and are flicker-free, and suitable for 4.6W-13.3W LED modules and fixtures. It is a SELV independent ballast, with wide operating windows for easy installation, this allows for quick installation and fewer supplies. - Push-fit terminals and looping design - Flicker-free and smooth dimming - Large wiring space, transparent end cap - Quick and easy wiring with push-fit terminals and conduit wiring - Protection rating IP20 - 2 separate strain relief sections for input and output cables with very robust terminals





SPECIFICATIONS

Brand:	Interlight
Product type:	Dimmable
Model:	Dynamic
Suitable for outdoor use:	No
Dimmable:	Yes
Dimmable phase cut:	Yes
Dimmable phase cut:	Yes
Housing:	Plastic housing
Suitable for constant current:	Yes
Suitable for constant voltage:	No
Output voltage:	42 V
Output Current:	180 mA
Suitable for direct voltage (primary side):	No
Output power:	4 - 9 W
Input voltage:	220 - 240 V
Frequency input voltage:	47 - 53 Hz
Overload protection:	Yes
Emergency power supply system:	No
Overtemperature protection:	Yes
Ambient temperature:	-20 - 55 °C
Short circuit protection:	Yes
Max. number of fixtures per line protection switch B16:	200
Max. number of fixtures per line protection switch C16:	213
Degree of protection (IP):	IP20
Protection class according to IEC 61140:	II
Operating device life:	50000 h
Length:	86 mm
Width:	52 mm



Height: 30 mm



ACCESSORIES

Article	Description
IL-S50W	Connection cable 2x0.75mm ² 50cm black for GST18i3
2811 020	Connecting cable 2.0m H03VVH2-F2x0.75mm ² black Euro 2.5A/250V

DOWNLOADS AVAILABLE FROM WEBSITE

Circuitbreaker
Certificates
Datasheet