





PRODUCT DATASHEET | IL-WP15060K4S+
EASYFIT+ LED IP66 CONSTRUCTION 47W 4,000K 6,400LM 1,500MM INCL. DRIVER & SENSOR

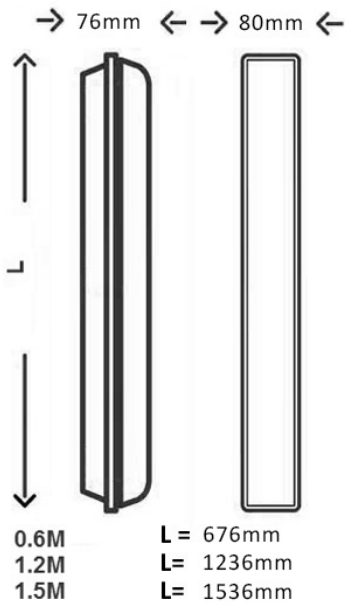

1	2	3	4	5	6	7	8
ON	ON	100%	ON	ON	5 min	ON	ON
ON	ON	75%	ON	ON	10 min	ON	ON
ON	ON	50%	ON	ON	15 min	ON	ON
ON	ON	25%	ON	ON	20 min	ON	ON
ON	ON	10%	ON	ON	30 min	ON	ON
ON	ON	5%	ON	ON	45 min	ON	ON
ON	ON	1%	ON	ON	60 min	ON	ON
ON	ON	0.5%	ON	ON	90 min	ON	ON
ON	ON	0.1%	ON	ON	120 min	ON	ON

Lumenoutput			
IL-WP6020K4S+	200	10W	1350 lm
	250	13W	1750 lm
	300	15W	2000 lm
	350	18W	2400 lm
IL-WP12040K4S+	200	21W	3000 lm
	250	24W	3350 lm
	300	29W	4000 lm
	350	34W	4600 lm
IL-WP15060K4S+	200	26W	3700 lm
	250	34W	4700 lm
	300	40W	5500 lm
	350	47W	6400 lm







DESCRIPTION

The Easyfit+ waterproof fixtures are the successor to our first generation of Easyfit waterproof surface-mounted fixtures. We have developed the best features of the first generation into a full-fledged successor with more ease of installation and better efficiency. The Easyfit+ surface-mounted fixtures are waterproof and fully protected against dust (IP66). The fixture is easy to open with the stainless steel locking clips and can be fitted with locking screws so that the fixture cannot be opened without tools. The fixture is made of PC, polycarbonate. This material is UV resistant, fire retardant and has high impact resistance (IK08). Thanks to the simple connection terminals, the fixture is quickly connected. The fixture comes standard with conduit wiring 5x2.5mm² with connectors with plug-in terminals on both sides, so you can easily and quickly connect the power cable. Thereby, a swivel is already mounted on one side. On the other side is a swivel blind plug that can be replaced in seconds with the supplied second swivel. The fixture is equipped with an Interlight X5 driver which can be set to four positions with dipswitches. The driver is set to 350 milliamps by default and can be switched back to 200 milliamps to reduce the lumen output. Thanks to the high-quality chips, the output of this fixture >is 140 lumens per watt in the 60cm and even >150 lumens per watt in the 120 and 150cm. The sensor can be set as desired by dip switches. Detection range; 100%*, 50% Run time; 5sec*, 5min, 10min, 30min Daylight sensor; 30-150Lux, 50-150Lux, 100-200Lux, disabled* Standby period: 0sec*, 3min, 10min, infinity Standby dimming level: 30%, 10%* * *factory default setting* The fixture comes standard with: two mounting brackets with screws and plugs and two pendant hooks to suspend the fixture from a cable or chain. The fixture is equipped with a PG13.5 gland, it is suitable for a cable diameter up to 12mm.

4000K NEUTRAL	max 44 WATT	max 6830 LUMEN	IK 08
IP 66	50.000 UUR	L B 90 10	
		CRI >80	



SPECIFICATIONS

Brand:	Interlight
Product type:	Waterproof
Suitable for wall mounting:	Yes
Suitable for pendulum suspension:	Yes
Suitable for ceiling mounting:	Yes
Suitable for flush mounting:	No
Suitable for surface mounting:	Yes
Suitable for light line configuration:	Yes
Suitable for clamp mounting:	No
With mounting material:	Yes
Suitable for monitor workplace according to EN 12464-1:	No
Lamp type:	LED interchangeable
With light source:	Yes
Suitable for number of light sources:	1
Lampholder:	Other
Housing material:	Plastic
Surface protection housing:	Plasticized
Housing color:	Gray
Material cover:	Plastic opal
Grid version:	No
Nom. voltage :	230 V
Voltage type:	AC
Nom. current :	200 - 350 mA
Ballast:	LED control current-controlled
Driver included:	Yes
Interchangeable ballasts:	Yes
Dimmable:	No
Light distributor:	Diffuser lens/optics/panel



Light distribution:	Symmetrical
Beam angle:	>80° - Extremely wide beam
Color consistency (McAdam ellipse):	SDCM5
Light outlet:	Direct
Energy efficiency class of the light source according to EU regulations 2019/2015:	D
Nom. life L70/B50 at 25 °C :	170000 h
Lumen maintenance at average lifetime of 35,000 hours at 25 °C environment (tq):	93 %
Lumen maintenance at average lifetime of 50,000 hours at 25 °C environment (tq):	90 %
Lumen maintenance at average lifetime of 75,000 hours at 25 °C environment (tq):	85 %
Failure at average service life of 35,000 hours at 25 °C environment (tq):	5 %
Failure at average service life of 50,000 hours at 25 °C environment (tq):	10 %
Protection degree back (IP):	Other
Failure at average service life of 75,000 hours at 25 °C environment (tq):	15 %
Degree of protection front (IP):	IP66
Degree of protection (IP):	IP66
Maximum number of fixtures per circuit breaker C10 (MCB):	19
Max. number of fixtures per line protection switch B16:	31
Max. number of fixtures per line protection switch C16:	31
Impact resistance:	IK08
Protection class according to IEC 61140:	I



Luminaire with limited surface temperature "D-sign" according to EN 60598-2-24:	Yes
Emergency power supply integrated:	No
Nom. ambient temperature according to IEC62722-2-1 :	-25 - 40 °C
Suitable for emergency lighting:	Yes
With presence detector:	No
With motion sensor:	Yes
Specific luminous flux luminaire:	125 lm/W
Effective luminous flux according to IEC 62722-2-1:	6400 lm
Motion sensor/presence detector technology:	High-frequency
With light sensor:	Yes
Cover fixture with thermal insulation material possible:	No
With air slots:	No
Glow wire test according to IEC 60695-2-11:	650 °C - 30 s
Suitable for lamp power:	25 - 44 W
Specific luminous flux luminaire:	136.2 - 142.3 lm/W
Max system power:	44 W
Effective luminous flux according to IEC 62722-2-1:	4150 - 6830 lm
Light color:	White
Color temperature:	4000 K
Flickering value Pst LM:	0.9
Color rendering index:	80-89
Power factor:	0.9
Strobe effect value SVM:	0.35
Width:	80 mm
Height/depth:	76 mm
Length:	1500 mm



Type of wiring:	Incl. through-wiring
Number of poles:	5
Geleiderdoorsnede:	2.5 mm ²
Totale harmonische vervorming (THD):	19 %
Connection method:	Plug clamp
Connectable conductor cross section:	0.75 - 1.5 mm ²
Light color adjustable:	No
Luminous flux adjustable:	Stands
Beam angle adjustable:	No



ACCESSORIES

Article	Description
IL-OMIM01.LD.020	Emergency power supply 1h LED 50V-250V

DOWNLOADS AVAILABLE FROM WEBSITE

LDT-File
Sensor manual
Manual
Circuitbreaker
Detection distance and exit time