




PRODUCT DATASHEET | IL-PN195US

EASYFIT NEXT+ LED PANEL 30W (1195X295X28MM) 3,000/3,500/4,000K UGR<19 EX. DRIVER



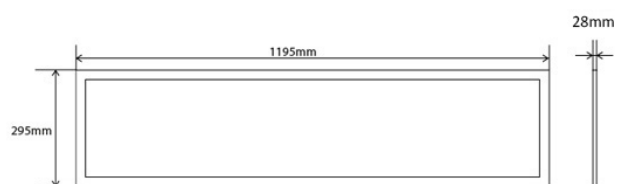

DESCRIPTION

Discover Interlight's updated LED panels: the Easyfit Next+ series, with a UGR value of <19. All our luminaires meet the strict NEN 12464-1 standard, which guarantees quality and performance. The Next+ variants are distinguished by their prismatic cover plate, which diffuses the light in a unique way, making glare a thing of the past. This makes the luminaires perfect for environments where intensive work is carried out, such as offices, healthcare facilities, receptions and classrooms, especially where screens are used. What makes our fixtures extra special is that we design them entirely in-house. This allows us to maintain the highest quality standards, which is why we proudly offer a warranty of no less than 7 years. Our luminaires are not maxed out (80%), and the lenses on the LEDs are made of PMMA, a durable and colorfast plastic. We guarantee lumen maintenance of 70% after 50,000 hours. With normal use (8 burning hours per day), this means that after 7 years you only get to 20,440 hours, so no need to worry! The Next+ LED panel in our series offers a color temperature of 3CCT (3,000, 3,500 and 4,000 Kelvin). A convenient switch lets you effortlessly set the desired light color, the best setting for any room. Moreover, the panel is remarkably slim, at only 28 mm thick, allowing it to integrate seamlessly into any interior. The Next panel is a backlit panel. This Next+ panel comes without a driver and offers the flexibility to be combined with a suitable Interlight driver. Choose from an on/off, 1-10 Volt, Dali or Thinq driver and set the driver at up to 800mA for optimal performance and durability. Choose for the future with Interlight's Easyfit Next+ series.

3000K 3500K 4000K	3570~ 3715 LUMEN	30 WATT	CRI >82
UGR <19		PF 0.95	50.000 HR
VAC 230			



SPECIFICATIONS

Brand:	Interlight
Product type:	Panel
Suitable for wall mounting:	No
Suitable for wall mounting:	No
Suitable for pendulum suspension:	Yes
Suitable for ceiling mounting:	Yes
Suitable for flush mounting:	Yes
Suitable for surface mounting:	Yes
Suitable for light line configuration:	No
Suitable for clamp mounting:	No
With mounting material:	No
Suitable for monitor workplace according to EN 12464-1:	Yes
Lamp type:	LED not interchangeable
With light source:	Yes
Suitable for number of light sources:	1
Lampholder:	Other
Housing material:	Aluminum
Surface protection housing:	Lacquered
Housing color:	White
Material cover:	Plastic opal
Grid version:	No
Voltage type:	AC
Nom. current :	800 - 1000 mA
Ballast:	LED control current-controlled
Driver included:	No
Interchangeable ballasts:	Yes
Dimmable:	Yes
Dimmable 0-10 V:	Yes



Dimmable 1-10 V:	Yes
Dimmable DALI:	Yes
Dimmable Dali-2:	Yes
Dimmable phase cut:	No
Dimmable phase cut:	No
Dimming dependent on driver:	Yes
Light distributor:	Diffuser lens/optics/panel
Light distribution:	Symmetrical
Beam angle:	>80° - Extremely wide beam
Color consistency (McAdam ellipse):	SDCM3
Light outlet:	Direct
Energy efficiency class of the light source according to EU regulations 2019/2015:	E
Part of a holder according to 2019/2020/EU:	No
Nom. life L70/B50 at 25 °C :	125000 h
Lumen maintenance at average lifetime of 35,000 hours at 25 °C environment (tq):	90 %
Lumen maintenance at average lifetime of 50,000 hours at 25 °C environment (tq):	87 %
Lumen maintenance at average lifetime of 75,000 hours at 25 °C environment (tq):	80 %
Failure at average service life of 35,000 hours at 25 °C environment (tq):	10 %
Failure at average service life of 50,000 hours at 25 °C environment (tq):	20 %
Nom. life L80/B10 at 25 °C :	50000 h
Protection degree back (IP):.	IP44
Failure at average service life of 75,000 hours at 25 °C environment (tq):	40 %



Degree of protection front (IP):	IP20
Degree of protection (IP):	IP20
Maximum number of fixtures per circuit breaker C10 (MCB):	45
Max. number of fixtures per line protection switch B16:	72
Max. number of fixtures per line protection switch C16:	72
Impact resistance:	IK02
Protection class according to IEC 61140:	II
Luminaire with limited surface temperature "D-sign" according to EN 60598-2-24:	No
Emergency power supply integrated:	No
Emergency power supply system:	No
Nom. ambient temperature according to IEC62722-2-1 :	-10 - 40 °C
Suitable for emergency lighting:	Yes
With presence detector:	No
With motion sensor:	No
Effective luminous flux according to IEC 62722-2-1:	3715 lm
With light sensor:	No
Cover fixture with thermal insulation material possible:	No
With air slots:	No
Glow wire test according to IEC 60695-2-11:	650 °C - 30 s
Light color according to EN 12464-1:	Neutral white 3300 - 5300 K
Suitable for lamp power:	26 - 40 W
Specific luminous flux luminaire:	110 - 118 lm/W
Max system power:	40 W



Effective luminous flux according to IEC 62722-2-1: 2930 - 4580 lm

Light color: White

Color temperature: 3000 - 4000 K

Color rendering index: 80-89

Power factor: 0.95

Width: 295 mm

Height/depth: 28 mm

Length: 1195 mm

Type of wiring: End

Number of poles: 2

Totale harmonische vervorming (THD): 9 %

Connection method: Plug clamp

UGR: 19

Light color adjustable: Stands

Luminous flux adjustable: Stands

Beam angle adjustable: No

Operation via App: No

Compatible with Casambi: No

Compatible with Apple HomeKit: No

Compatible with Google Assistant: No

Compatible with Amazon Alexa: No

With IFTTT support: No



ACCESSORIES

Article	Description
IL-X4D32PO3	Driver led 32W 800mA/230V non dimmable + 3 poles for GST18i3
IL-X4D32WI3	Driver led 32W 800mA/230V non dimmable + 2 pole Wieland
IL-X4D32WA3	Driver led 32W 800mA/230V non dimmable + 3 pole Wago
IL-X4D32	Driver led 32W 800mA/230V not dimmable
IL-X4D32PO2	Driver led 32W 800mA/230V non dimmable + 2 pole Euro
IL-S50W	Connection cable 2x0.75mm ² 50cm black for GST18i3
IL-D48DALI2L	Driver led universal DALI2 650 to 1,100mA/42W loopable
IL-X3D40	Driver led dip switch 650 to 1,000mA not dimmable
IL-PKITB	Pendant kit panels 1,500mm black RAL9017
IL-PKITW	Pendant kit panels 1,500mm white RAL9003
IL-D53DALI2	Driver led universal DALI2 650 to 1,100mA/47W
IL-X2D40-1-10	Driver led dip switch 400 to 1,100mA 1-10V dimmable
IL-DCISET+	Emergency lighting module with inverter and battery 3,000mAh
IL-P195SK4	Surface mounted set panel 1200x300mm IL-P195 white RAL9003
IL-P195SK4B	Surface mounted panel set 1200x300mm IL-P195 black RAL9017
IL-PKITSN4	Springs for panel 4 pcs.
2811 020	Connecting cable 2.0m H03VVH2-F2x0.75mm ² black Euro 2.5A/250V

DOWNLOADS AVAILABLE FROM WEBSITE

CE declaration
LDT-File
LM79 report
TM21 report
Circuitbreaker
Lumen output
Dimtest
Manual