
PRODUCT DATASHEET | 621 32 525 000

FT038.0525.25 SPRING REEL 15M H07RN-F5G2,5/5P TOW 25A





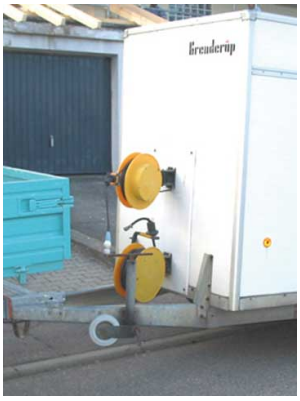

DESCRIPTION

The load capacity depends on whether the reel is unwound or coiled.
Loadable unwound: 6800W.
loadable coiled: 2200W.
Reel has a protection rating of IP44.

SPECIFICATIONS

Brand:	Otto Schill
Product type:	FT038052525 15m H07RN-F5G2.5
Housing material:	Plastic
Vein cross section:	2.5 mm²
Cable supply:	H07RN-F
Number of cores:	5
Cable length:	15 m
Support frame:	No
Automatic cable roll-up:	Yes
With thermal protection:	Yes
Degree of protection (IP):	IP44

DOWNLOADS AVAILABLE FROM WEBSITE

Datasheet ENG