




PRODUCT DATASHEET | IL-DC636CTAM

IP44 LED SPOTLIGHT 6W Ø88MM CTA DIMMABLE BRUSHED CHROME INCL. DRIVER



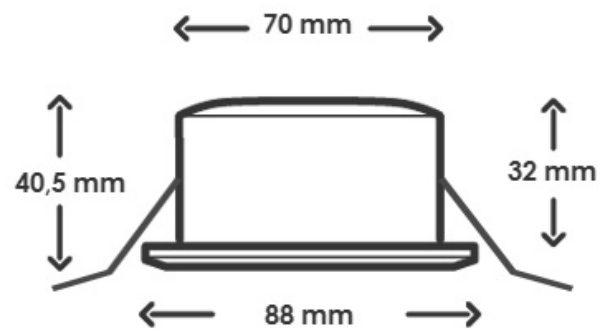

DESCRIPTION

Non glare, perfect for office, healthcare environment, hospitality, hallways. IP44, so also applicable in bathrooms. Not suitable for outdoor use. Comes with driver included.

2000K 2700K	 36 GRADEN	6 WATT	434 LUMEN
CD 930	CRI >95	PF 0.85	40.000 UUR
	VAC 230	IP 44	



SPECIFICATIONS

Brand:	Interlight
Product type:	Downlight
Suitable for surface mounting:	No
Suitable for flush mounting:	Yes
Suitable for wall mounting:	No
Suitable for wall mounting:	No
Suitable for pendulum suspension:	No
Suitable for ceiling mounting:	Yes
Adjustability:	Swivel
With motion sensor:	No
With light sensor:	No
Lamp type:	LED not interchangeable
With light source:	Yes
Suitable for number of light sources:	1
Lampholder:	No
Nom. voltage :	230 V
Housing material:	Aluminum
Surface protection:	Lacquered
Housing color:	Stainless steel (stainless steel)
Material cover:	Plastic structured
Surface brushed:	No
Voltage type:	AC
Ballast:	LED control current-controlled
Driver included:	Yes
Dimmable:	Yes
Interchangeable ballasts:	
Dimmable phase cut:	Yes
Dimmable phase cut:	Yes
Reflector:	High Gloss



Light distribution:	Symmetrical
Beam angle:	21-40° - Medium radiant
Light outlet:	Direct
Nom. life L70/B50 at 25 °C :	140000 h
Lumen maintenance at average lifetime of 35,000 hours at 25 °C environment (tq):	90 %
Lumen maintenance at average lifetime of 50,000 hours at 25 °C environment (tq):	85 %
Lumen maintenance at average life of 100,000 hours at 25 °C environment (tq):	75 %
Failure at average service life of 35,000 hours at 25 °C environment (tq):	10 %
Failure at average service life of 50,000 hours at 25 °C environment (tq):	10 %
Failure at average life of 100,000 hours at 25 °C environment (tq):	50 %
Degree of protection (IP):	IP44
Impact resistance:	IK02
Protection class according to IEC 61140:	II
Suitable for lamp power:	6 W
Max system power:	6 W
Effective luminous flux according to IEC 62722-2-1:	434 lm
Light color:	White
Color temperature:	2000 - 2700 K
Brightness:	898 cd
Color rendering index:	90-100
Installation diameter:	70 mm
Height/depth:	40.5 mm
Outer diameter:	88 mm



Type of wiring:	End
Number of poles:	2
Connection method:	Plug clamp
Luminaire with limited surface temperature "D-sign" according to EN 60598-2-24:	No
Photobiological safety in accordance with EN 62471:	RG0
Suitable for monitor workplace according to EN 12464-1:	Yes
Cover fixture with thermal insulation material possible:	Yes
Color consistency (McAdam ellipse):	SDCM3



ACCESSORIES

Article	Description
2221 020	Connecting cable 2,0m H05VV-F3G1,0mm2 black angled 16A/250V

DOWNLOADS AVAILABLE FROM WEBSITE

Circuit breaker
Dimmer
Manual