




PRODUCT DATASHEET | IL-LUCMCTATPB

LUCID LED TRACK SPOT PENDANT 6/9W 2,000-3,000K CTA DIMMABLE BLACK

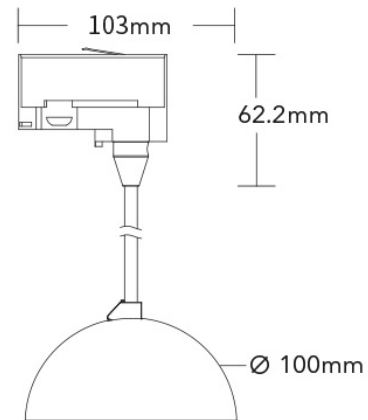

DESCRIPTION

The Lucid is a spherical fixture that can be fitted with various covers with different shapes and lenses. Metal housing with a high-quality matte black finish. The fixture can also be fitted with various colors of reflectors, for a very special effect. Suitable for a 3-phase track rail, in which this fixture can be placed directly or via a pendant mount. The cord of this pendant Lucid is 1.5m long. Dual power (6 watts / 9 watts) and equipped with dim-to-warm (2,000-3,000 Kelvin). Triac dimmable. [Learn more](#)

2000K 3000K	6 9 WATT	328 585 LUMEN	CRI >95
UGR <27 <19		VAC 230	50.000 HOURS
L B 90 50			



SPECIFICATIONS

Brand:	Interlight
Product type:	Module track pendulum
Suitable for surface mounting:	No
Suitable for flush mounting:	No
Suitable for wall mounting:	No
Suitable for pendulum suspension:	Yes
Suitable for ceiling mounting:	No
Suitable for truss mounting:	No
Suitable for pedestal/floor mounting:	No
Suitable for power rail mounting:	Yes
Suitable for clamp mounting:	No
Suitable for low voltage cable system:	No
With motion sensor:	No
With light sensor:	No
Lamp type:	LED not interchangeable
With light source:	Yes
Suitable for number of light sources:	1
Lampholder:	Other
Housing material:	Aluminum
Surface protection:	Lacquered
Housing color:	Black
Material cover:	Other
Surface brushed:	No
Voltage type:	AC
Nom. voltage :	220 - 240 V
Ballast:	LED control current-controlled
Driver included:	Yes
Dimming dependent on driver:	Yes



Reflector:	High Gloss
Light distributor:	Diffuser lens/optics/panel
Light distribution:	Symmetrical
Degree of protection (IP):	IP20
Impact resistance:	IK02
Protection class according to IEC 61140:	II
Nom. ambient temperature according to IEC62722-2-1 :	-10 - 40 °C
Suitable for lamp power:	6 - 9 W
Max system power:	9 W
Luminous flux:	328 - 585 lm
Light color:	White
Color temperature:	2000 - 3000 K
Color rendering index:	90-100
Type of wiring:	End
Number of poles:	2
UGR:	19



ACCESSORIES

Article	Description
IL-LUCL3B30	Lucid spherical lens 30° with reflector for IL-LUCMK
IL-LUCL2B36	Lucid flat lens 36° with reflector for IL-LUCMK
IL-LUCL1B36	Lucid flat lens 36° for IL-LUCMK
IL-LUCDW	Lucid white diffuser for IL-LUCM

DOWNLOADS AVAILABLE FROM WEBSITE

Adapter datasheet
Overview lumen output
Dimtest
LDT-File
Manual