




PRODUCT DATASHEET | IL-LUCMKSTPB

LUCID LED TRACK SPOT PENDANT 6/9W 3,000/4,000/5,000K DIMMABLE BLACK

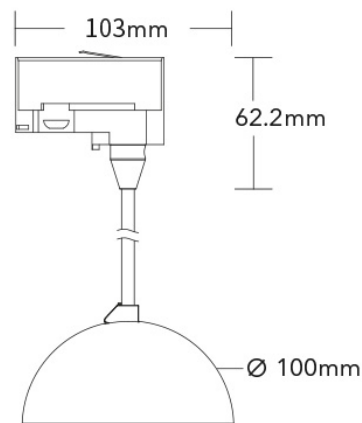

DESCRIPTION

Spherical fixture that can be fitted with various covers with different shapes and lenses. On two of the lenses, the reflector can be replaced to a color of your choice for a special effect. The entire metal housing has a high-quality matte black finish. The fixtures are suitable for a 3-phase track rail. The fixture can be placed directly into this or choose pendant mounting. The cord of this pendant Lucid is 1.5m long. Dual power (6 Watts / 9 Watts) and equipped with a 3CCT LED (3,000 / 4,000 / 5,000 Kelvin). Triac dimmable. Application areas: retail, offices and hospitality venues. - Track spotlight 45° tiltable, 350° rotatable. - Vary with different covers, lenses and reflectors. - Pendant finished with textile for luxurious look. [Learn more](#)

3000K 4000K 5000K	6 9 WATT	558 911 LUMEN	CRI >90
UGR <27 <19		VAC 230	50.000 HOURS
L B 90 50			



SPECIFICATIONS

Brand:	Interlight
Product type:	Module track pendulum
Suitable for surface mounting:	No
Suitable for flush mounting:	No
Suitable for wall mounting:	No
Suitable for pendulum suspension:	Yes
Suitable for ceiling mounting:	No
Suitable for truss mounting:	No
Suitable for pedestal/floor mounting:	No
Suitable for power rail mounting:	Yes
Suitable for clamp mounting:	No
Suitable for low voltage cable system:	No
With motion sensor:	No
With light sensor:	No
Lamp type:	LED not interchangeable
With light source:	Yes
Suitable for number of light sources:	1
Lampholder:	Other
Housing material:	Aluminum
Surface protection:	Lacquered
Housing color:	Black
Material cover:	Other
Surface brushed:	No
Voltage type:	AC
Nom. voltage :	220 - 240 V
Ballast:	LED control current-controlled
Driver included:	Yes
Dimming dependent on driver:	Yes



Reflector:	High Gloss
Light distributor:	Diffuser lens/optics/panel
Light distribution:	Symmetrical
Degree of protection (IP):	IP20
Impact resistance:	IK02
Protection class according to IEC 61140:	II
Nom. ambient temperature according to IEC62722-2-1 :	-10 - 40 °C
Suitable for lamp power:	6 - 9 W
Max system power:	9 W
Luminous flux:	558 - 911 lm
Light color:	White
Color temperature:	3000 - 5000 K
Color rendering index:	90-100
Type of wiring:	End
Number of poles:	2
UGR:	19



ACCESSORIES

Article	Description
IL-LUCL3B30	Lucid spherical lens 30° with reflector for IL-LUCMK
IL-LUCL2B36	Lucid flat lens 36° with reflector for IL-LUCMK
IL-LUCL1B36	Lucid flat lens 36° for IL-LUCMK
IL-LUCDW	Lucid white diffuser for IL-LUCM

DOWNLOADS AVAILABLE FROM WEBSITE

Adapter datasheet
Overview lumen output
Dimtest
LDT-File
Manual