




PRODUCT DATASHEET | IL-DN220KS

NEXT MULTI LED DOWNLIGHT 12/18W Ø220MM 3,000/4,000/6,000K IP44

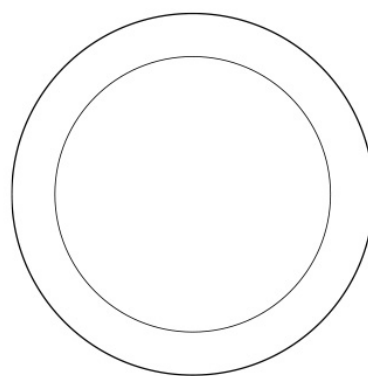

220 mm



22 mm





DESCRIPTION

Thanks to the inventive mounting system, you can use the downlight as a recessed downlight and as a surface-mounted ceiling light. When you choose the recessed option, you can place the springs on the frame for various installation sizes. With the slider on the back, you can switch between three light colors: warm white, neutral white and cool white. In addition, you can also switch between two wattages. Look for settings and options in the manual.

3000K 4000K 6000K	12 18 WATT	1080 1710 LUMEN	110°
CRI >80		PF 0.9	IP 44
30.000 HOURS	VAC 230	V5 YR	



SPECIFICATIONS

Brand:	Interlight
Product type:	Downlight
Suitable for surface mounting:	Yes
Suitable for flush mounting:	Yes
Suitable for wall mounting:	Yes
Suitable for wall mounting:	Yes
Suitable for pendulum suspension:	No
Suitable for ceiling mounting:	Yes
Suitable for truss mounting:	No
Suitable for pedestal/floor mounting:	No
Suitable for power rail mounting:	Yes
Suitable for clamp mounting:	No
Suitable for low voltage cable system:	No
Adjustability:	Not adjustable
With motion sensor:	No
Nom. voltage :	230 V
With light sensor:	No
Lamp type:	LED not interchangeable
With light source:	Yes
Suitable for number of light sources:	1
Lampholder:	Other
Housing material:	Plastic
Surface protection:	Plasticized
Housing color:	White
Material cover:	Plastic opal
Surface brushed:	No
Voltage type:	AC
Ballast:	LED control current-controlled



Driver included:	Yes
Dimmable:	No
Interchangeable ballasts:	No
Not dimmable:	Yes
Reflector:	Other
Light distributor:	Diffuser lens/optics/panel
Light distribution:	Symmetrical
Beam angle:	>80° - Extremely wide beam
Light outlet:	Direct
Energy efficiency class:	A+
Energy efficiency class of the built-in lamp:	A+
Energy efficiency class of the light source according to EU regulations 2019/2015:	F
Lumen maintenance at average lifetime of 35,000 hours at 25 °C environment (tq):	87 %
Lumen maintenance at average lifetime of 50,000 hours at 25 °C environment (tq):	81 %
Lumen maintenance at average life of 100,000 hours at 25 °C environment (tq):	66 %
Failure at average service life of 35,000 hours at 25 °C environment (tq):	10 %
Failure at average service life of 50,000 hours at 25 °C environment (tq):	10 %
Failure at average life of 100,000 hours at 25 °C environment (tq):	25 %
Degree of protection (IP):	IP44
Degree of protection front (IP):	IP44
Protection class according to IEC 61140:	II



Nom. ambient temperature according to IEC62722-2-1 : -10 - 40 °C

Suitable for lamp power: 12 - 18 W

Max system power: 18 W

Luminous flux: 1080 - 1710 lm

Effective luminous flux according to IEC 62722-2-1: 1710 lm

Specific luminous flux lamp: 95 lm/W

Light color: White

Color temperature: 3000 - 6000 K

Light color adjustable: Stands

Color rendering index: 80-89

Effective luminous flux according to IEC 62722-2-1: 1080 - 1710 lm

Luminous flux adjustable: Stands

Power factor: 0.9

Beam angle adjustable: No

Installation width: 200 mm

Length: 220 mm

Width: 220 mm

Height/depth: 22 mm

Outer diameter: 220 mm

Type of wiring: End

Number of poles: 2

Emergency power supply integrated: No

Connection method: Plug clamp

Specific luminous flux luminaire: 95 lm/W

Glow wire test according to IEC 60695-2-11: 650 °C - 30 s

Color consistency (McAdam ellipse): SDCM5

UGR: 22



ACCESSORIES

Article	Description
IL-DNT220	Next Multi track adaptor set 220mm
IL-DNR220B	Next Multi downlight surface-mounted ring Ø220mm black
IL-DNR220S	Next Multi downlight surface-mounted ring Ø220mm stainless steel

DOWNLOADS AVAILABLE FROM WEBSITE

LDT-File
EMC certificate
LVD Certificate
IEC certificate
CE Declaration
Manual