




PRODUCT DATASHEET | IL-TN10KSDW

NEXT MULTI LED SPOTLIGHT 10W 45° 3,000/4,000/5,700K DIMMABLE WHITE

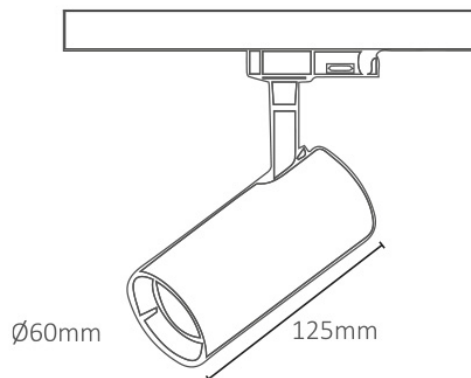

DESCRIPTION

The Next Multi track spotlight is sleek and modern in design. Suitable for 3-phase track systems. The track spotlight is available in black and white. The switches on the back allow switching between three light colors: 3,000, 4,000 and 5,700K. The track spotlight with Global adapter is easy to install, rotates 350° and swivels up to 90°. Built-in non-flick driver, 45° beam angle and LED SDCM<3 to ensure color consistency. The reflector is made of pure aluminum. In this, the reflective coating provides a uniform and comfortable light beam. The 10W tracks are triac dimmable. The trackspot has a wide range of applications, including retail, hotels and restaurants, among others [Learn more](#)

3000K 4000K 5700K	10 WATT	630~ 730 LUMEN	45°
	CRI >80	UGR <22	PF 0.9
30.000 HOURS	VAC 230	30.000HR 5YR	



SPECIFICATIONS

Brand:	Interlight
Product type:	Trackspot
Suitable for surface mounting:	No
Suitable for flush mounting:	No
Suitable for wall mounting:	No
Suitable for wall mounting:	No
Suitable for pendulum suspension:	No
Suitable for ceiling mounting:	No
Suitable for truss mounting:	No
Suitable for pedestal/floor mounting:	No
Suitable for power rail mounting:	Yes
Suitable for clamp mounting:	No
Suitable for low voltage cable system:	No
Adjustability:	Rotatable and pivotable
With motion sensor:	No
With light sensor:	No
Lamp type:	LED not interchangeable
With light source:	Yes
Suitable for number of light sources:	1
Lampholder:	No
Housing material:	Aluminum
Surface protection:	Lacquered
Housing color:	White
Material cover:	Plastic transparent
Surface brushed:	No
Led nom. current at constant current :	70 mA
Voltage type:	AC



Nom. voltage :	220 - 240 V
Nom. current :	70 mA
Ballast:	LED control current-controlled
Driver included:	Yes
Dimming dependent on driver:	Yes
Dimmable:	Yes
Interchangeable ballasts:	No
Dimmable phase cut:	Yes
Dimmable phase cut:	Yes
Reflector:	High Gloss
Light distributor:	Reflector
Light distribution:	Symmetrical
Beam angle:	41-80° - Broadcast
Light outlet:	Direct
Nom. life L70/B50 at 25 °C :	30000 h
Degree of protection (IP):	IP20
Impact resistance:	IK02
Protection class according to IEC 61140:	II
Nom. ambient temperature according to IEC62722-2-1 :	-10 - 40 °C
Suitable for lamp power:	10 W
Max system power:	10 W
Luminous flux:	630 - 730 lm
Effective luminous flux according to IEC 62722-2-1:	730 lm
Light color:	White
Color temperature:	3000 - 5700 K
Light color adjustable:	Stands
Color rendering index:	80-89
Luminous flux adjustable:	Stands
Power factor:	0.9



Length:	140 mm
Width:	70 mm
Height/depth:	50 mm
Type of wiring:	End
Number of poles:	2
Connection method:	Power rail adapter
Glow wire test according to IEC 60695-2-11:	650 °C - 30 s
Suitable for monitor workplace according to EN 12464-1:	No
Cover fixture with thermal insulation material possible:	No
UGR:	22

DOWNLOADS AVAILABLE FROM WEBSITE

LDT-File
CE declaration
Dimtest
Circuit breaker
Manual