






PRODUCT DATASHEET | IL-TO55K4AW

ORION LED TRACK 55W 85° 4,000K WHITE

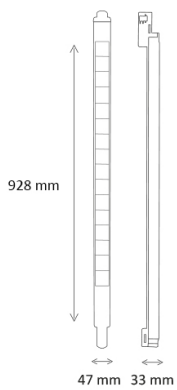

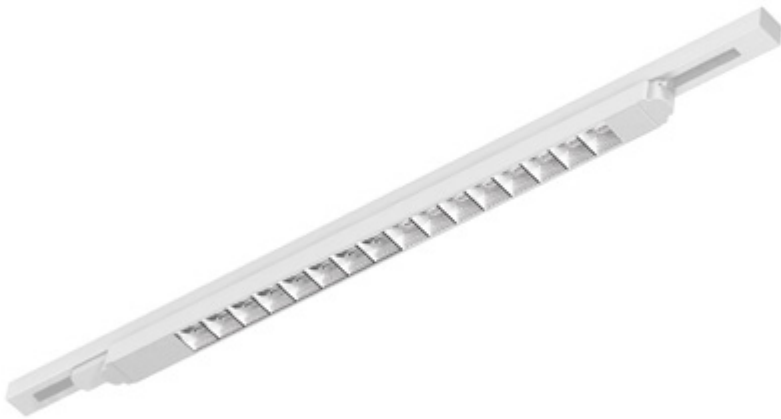

DESCRIPTION

The Orion Tracks can be installed in all common 3-phase track systems. You no longer need separate general lighting; all lighting can be integrated into the track. In addition to general lighting, there is also a choice of wallwash variants: these fixtures shine to the left, right or both sides. (94cm long) The white Orion track panel has the color RAL9016.

 55 WATT	PF 0,9	 4000K COOL	
CRI >80	5800 LUMEN	50.000 UUR	CD 3653
 85 GRADEN	 √5 YR		



SPECIFICATIONS

Brand:	Interlight
Product type:	Track light
Suitable for surface mounting:	No
Suitable for flush mounting:	No
Suitable for wall mounting:	No
Suitable for pendulum suspension:	No
Suitable for ceiling mounting:	No
Suitable for truss mounting:	No
Suitable for pedestal/floor mounting:	No
Suitable for power rail mounting:	Yes
Suitable for clamp mounting:	No
Suitable for low voltage cable system:	No
Adjustability:	Not adjustable
With motion sensor:	No
With light sensor:	No
Lamp type:	LED not interchangeable
With light source:	Yes
Suitable for number of light sources:	1
Lampholder:	Other
Housing material:	Plastic
Surface protection:	Plasticized
Housing color:	White
Material cover:	Plastic transparent
Surface brushed:	No
Voltage type:	AC
Nom. voltage :	230 - 240 V
Ballast:	LED control current-controlled
Driver included:	Yes



Not dimmable:	Yes
Reflector:	High Gloss
Light distributor:	Reflector
Light distribution:	Symmetrical
Beam angle:	>80° - Extremely wide beam
Light outlet:	Direct/indirect
Energy efficiency class of the built-in lamp:	A++, A+, A (LED)
Nom. life L70/B50 at 25 °C :	50000 h
Nom. life L90/B50 at 25 °C :	20000 h
Degree of protection (IP):	IP20
Impact resistance:	IK07
Protection class according to IEC 61140:	II
Nom. ambient temperature according to IEC62722-2-1 :	-20 - 40 °C
Suitable for lamp power:	55 W
Max system power:	55 W
Luminous flux:	5800 lm
Effective luminous flux according to IEC 62722-2-1:	5800 lm
Specific luminous flux lamp:	105 lm/W
Light color:	White
Color temperature:	4000 K
Brightness:	3653 cd
Color rendering index:	80-89
Power factor:	0.9
Length:	928 mm
Width:	48 mm
Type of wiring:	End
Number of poles:	2
Connection method:	Power rail adapter
Specific luminous flux luminaire:	105 lm/W



Glow wire test according to IEC 60695-2-11:	650 °C - 30 s
--	---------------

Suitable for monitor workplace according to EN 12464-1:	Yes
--	-----

Cover fixture with thermal insulation material possible:	No
---	----

DOWNLOADS AVAILABLE FROM WEBSITE

LDT-File

Circuitbreaker

CE declaration

Manual