




PRODUCT DATASHEET | IL-TRS30CTACS
PLAY LED TRACK SPOTLIGHT 30W 38° 2,700K-5,000K SILVER CRI>90






DESCRIPTION

Meetings in the morning, drinks in the afternoon? With Interlight Play fixtures, you never have to choose one light color or amount of light again. Using the remote control, you can easily choose between warm or cool white light, or anything in between. You can also easily adjust the amount of light. In addition, you can group the fixtures together. Dim the fixtures for a presentation, turn on the warm light for a cozy get-together, choose cool white light to get things cleaned up in the evening. When you leave the building in the evening, just press one button to switch the fixtures to an atmospheric night mode.

With all Play spots, you can choose between a silver or black ring on the front.
Color: RAL9006

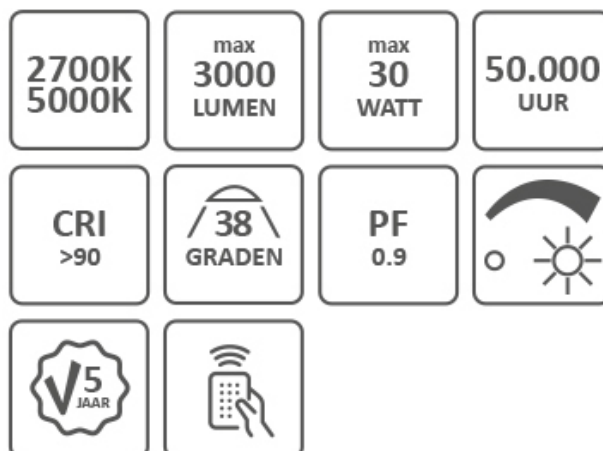



SPECIFICATIONS

Brand:	Interlight
Product type:	Trackspot
Suitable for surface mounting:	No
Suitable for flush mounting:	No
Suitable for wall mounting:	No
Suitable for pendulum suspension:	No
Suitable for ceiling mounting:	No
Suitable for truss mounting:	No
Suitable for power rail mounting:	Yes
Suitable for pedestal/floor mounting:	No
Suitable for clamp mounting:	No
Suitable for low voltage cable system:	No
Adjustability:	Rotatable and pivotable
With motion sensor:	No
With light sensor:	No
Lamp type:	LED not interchangeable
With light source:	Yes
Suitable for number of light sources:	1
Lampholder:	Other
Housing material:	Aluminum
Surface protection:	Lacquered
Housing color:	Silver
Material cover:	Plastic transparent
Surface brushed:	No
Voltage type:	AC
Nom. voltage :	230 V
Driver included:	Yes
Dimming dependent on driver:	Yes



Dimmable RF:	Yes
Reflector:	High Gloss
Light distributor:	Reflector
Light distribution:	Symmetrical
Beam angle:	21-40° - Medium radiant
Light outlet:	Direct
Energy efficiency class of the built-in lamp:	A++, A+, A (LED)
Nom. life L80/B10 at 25 °C :	50000 h
Degree of protection (IP):	IP20
Degree of protection (NEMA).:	2
Impact resistance:	IK02
Protection class according to IEC 61140:	II
Nom. ambient temperature according to IEC62722-2-1 :	230 °C
Suitable for lamp power:	30 W
Max system power:	30 W
Luminous flux:	3000 lm
Effective luminous flux according to IEC 62722-2-1:	3000 lm
Specific luminous flux lamp:	100 lm/W
Light color:	White
Color temperature:	2700 - 5000 K
Color rendering index:	90-100
Power factor:	0.9
Type of wiring:	End
Number of poles:	2
Connection method:	Plug clamp
Photobiological safety in accordance with EN 62471:	RG0
Suitable for monitor workplace according to EN 12464-1:	No



Cover fixture with thermal insulation material possible: No



DOWNLOADS AVAILABLE FROM WEBSITE

Manual
