




PRODUCT DATASHEET | IL-AITC30B24

SENSE LED CONTOUR TRACK SPOT 30W 24° 2,700-6,500K CRI95 BLACK AI

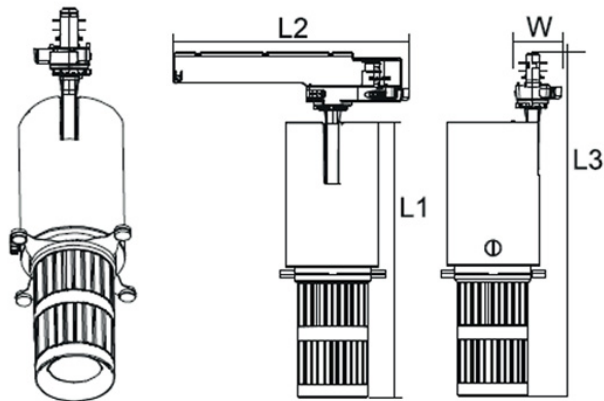

Ø	80
L1	240
L2	220
L3	298
W	45





DESCRIPTION

The Sense Trackspot is an advanced, smart spotlight that is fully digitally controlled. Unlike the Sense Trackspot, the Contour Trackspot does not have its own sensor. However, it can be paired with a Sense Trackspot in a group or set up manually using a specially developed app. In this app, it is possible to place multiple trackspots in a group, allowing them to be controlled together.

The Sense Contour Track Spot has an adjustable range from 2,700K to 6,500K and offers a full spectrum of light colors. With an impressive CRI value of 95 with color enhancement, this spotlight offers perfect light color. The beam of the Contour Track Spot can be adjusted as desired. For example, the degree beam can be adjusted between 24 and 31 degrees, and the sharpness of the beam can also be adjusted. The presence of iron blades allows the beam to be adjusted to any desired shape, allowing variation when illuminating round, square and rectangular objects. The Sense Trackspot can be used in Staff, Global and Nordic rail, among others. The track spot does not fit in an Erco and Eutrac rail. RAL color: 7021 [Learn more](#)

2700K~ 6500K	30 WATT	max 750 LUMEN	
CRI 95		PF 0.9	
50.000 HR	VAC 230		



SPECIFICATIONS

Brand:	Interlight
Product type:	Contour track spot
Suitable for surface mounting:	No
Suitable for flush mounting:	No
Suitable for wall mounting:	No
Suitable for pendulum suspension:	No
Suitable for ceiling mounting:	No
Suitable for truss mounting:	No
Suitable for pedestal/floor mounting:	No
Suitable for power rail mounting:	Yes
Suitable for clamp mounting:	No
Suitable for low voltage cable system:	No
Adjustability:	Rotatable and pivotable
With motion sensor:	Yes
With light sensor:	Yes
Lamp type:	LED not interchangeable
With light source:	Yes
Suitable for number of light sources:	1
Housing material:	Aluminum
Surface protection:	Lacquered
Housing color:	Black
Voltage type:	AC
Nom. voltage :	220 - 240 V
Ballast:	LED control current-controlled
Driver included:	Yes
Dimmable:	Yes
Interchangeable ballasts:	No
Dimmable 0-10 V:	No



Dimmable 1-10 V:	No
Dimmable Dali-2:	No
Dimmable DALI:	No
Dimmable DMX:	No
Dimmable DSI:	No
Dimmable with potentiometer (integrated):	No
Dimmable LineSwitch:	No
Dimming manufacturer-specific:	No
Dimmable mains voltage modulation:	No
Dimmable phase cut:	No
Dimmable phase cut:	No
Dimming programmable:	Yes
Dimmable RF:	No
Dimmable Sine Wave Reduction:	No
Dimmable Touch and Dim:	No
Dimmable Zigbee:	No
Not dimmable:	No
Dimmable with push-button:	No
Reflector:	Mat
Light distributor:	Reflector
Light distribution:	Symmetrical/asymmetrical
Reflector color:	Silver
Beam angle:	21-40° - Medium radiant
Light outlet:	Direct/indirect
Constant luminous flux control:	No
Degree of protection (IP):	IP20
Protection class according to IEC 61140:	I
Nom. ambient temperature according to IEC62722-2-1 :	-20 - 40 °C
Suitable for lamp power:	30 W



Max system power:	30 W
Luminous flux:	0 - 750 lm
Effective luminous flux according to IEC 62722-2-1:	750 lm
Light color:	White
Color temperature:	2700 - 6500 K
Light color adjustable:	Stepless
Color rendering index:	90-100
Effective luminous flux according to IEC 62722-2-1:	0 - 750 lm
Luminous flux adjustable:	Stepless
Beam angle adjustable:	Stands
Length:	169 mm
Width:	209 mm
Height/depth:	160 mm
Outer diameter:	80 mm
Emergency power supply integrated:	No
Max. number of fixtures per line protection switch B16:	58
Max. number of fixtures per line protection switch C16:	58
Suitable for monitor workplace according to EN 12464-1:	No
Cover fixture with thermal insulation material possible:	No
Operation via App:	Yes



ACCESSORIES

Article	Description
IL-AIGAT	Sense gateway
IL-AICON	Sense controller excl. 2 CR2430 batteries

DOWNLOADS AVAILABLE FROM WEBSITE

Sensetrack app manual
Manual