
PRODUCT DATASHEET | IL-TSDALISAS


THINQ DALI STAND-ALONE SENSOR, RECESSED AND SURFACE-MOUNTED








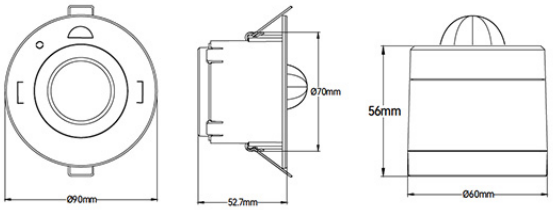





DESCRIPTION

This PIR sensor with Thinq technology can be combined with DALI-2 drivers. The sensor is wirelessly configurable via the free Interlight Thinq app and is suitable for both recessed and surface mounting. The included lens allows the detection range to be adjusted for applications such as corridors and doorways.

- Compatible with DALI-2 drivers
- Wireless configuration via the Interlight Thinq app
- Suitable for recessed and surface mounting
- Includes lens for use in corridors and near doors
- Extensive setting options

SPECIFICATIONS

Brand:	Interlight
Product type:	Sensor
Model:	Motion Sensor
Motion sensor/presence detector technology:	Passive infrared
Constant light control:	Yes
HVAC control:	Yes
Forced entry:	Yes
Forced shutdown:	Yes
Free animal zone:	No
Undercut protection:	No
Linkable to network:	Yes
Scan angle:	127 °
Optimal mounting height:	6 m
Max. range sideways:	8 m
Diameter range on floor:	6 m
Suitable for wireless:	Yes
Remote operation:	Yes
With remote control:	No
Call sensitivity adjustable:	Yes
Address brightness adjustable:	Yes
Mounting method:	Other
Suitable for ceiling mounting:	Yes
Ceiling flush mounting without installation box:	Yes
Suitable for wall mounting:	Yes
Met montagebeugel:	Ja
Connection method:	Other
Material:	Plastic
Material quality:	Thermoplast
Color:	White

Degree of protection (IP):	IP44
Voltage type:	AC
Frequency:	50 - 60 Hz
Nom. voltage :	220 - 240 V
Battery powered:	No
Vervangbare batterij:	Nee
Ambient temperature:	-20 - 50 °C
Height:	56 mm
Diameter:	90 mm
Installation diameter:	70 mm
With connection cable:	Yes

ACCESSORIES

Article	Description
IL-S50W	Connection cable 2x0.75mm2 50cm black for GST18i3
2811 020	Connecting cable 2.0m H03VVH2-F2x0.75mm2 black Euro 2.5A/250V

DOWNLOADS AVAILABLE FROM WEBSITE

Visit the Thinq website
Datasheet
Manual