





PRODUCT DATASHEET | IL-DT40DALI
THINQ DRIVER D4I DALI2 NFC 500 TO 1,050MA/40W



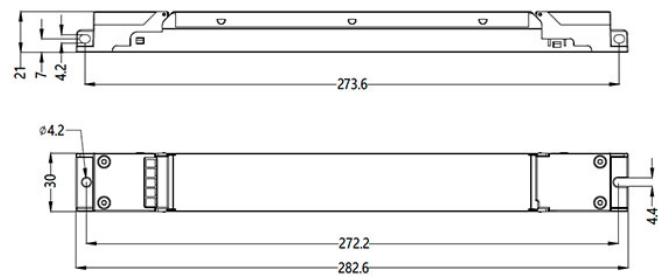

DESCRIPTION

- Built-in DALI-2 interface, DALI DT6 device
- Dimmable LED driver with linear metal housing. Max. output power 40 W
- Current from 500-1050 mA selectable via NFC programming tool. Min. current adjustable to 0.1 mA
- DALI address/group/scene setting via NFC programming tool.
- Class II power supply, isolated design
- High power factor and efficiency
- For switching and dimming LED lighting fixtures
- Amplitude/CCR dimming, smooth and deep dimming
- Compatible with universal DALI masters that support DT6 commands
- DALI-250/251/252/253 compatible, DALI data built-in.
- IP20 rating, suitable for indoor LED lighting applications

The factory default setting is 800mA. It is possible to adjust it to any milliampere via the app.

Note: This component requires constant current.



SPECIFICATIONS

Brand:	Interlight
Product type:	Driver
Model:	Dynamic
Dimmable:	Yes
Dimming D4i:	Yes
Dimmable Dali-2:	Yes
Housing:	Metal housing
Suitable for constant current:	Yes
Suitable for constant voltage:	Yes
Output voltage:	10 - 54 V
Output Current:	500 - 1050 mA
Output power:	21 - 40 W
Input voltage:	120 - 277 V
Frequency input voltage:	50 - 60 Hz
Degree of protection (IP):	IP20
Protection class according to IEC 61140:	II
Length:	283 mm
Width:	30 mm
Height:	21 mm



ACCESSORIES

Article	Description
IL-TSDALIBIPIR	Thing DALI2 built-in PIR sensor