



Sense series Scene Switch Instructions




APP Version: 2.1.5



Power Supply Method


Only supports battery power, using a 3V lithium button battery (CR2430).

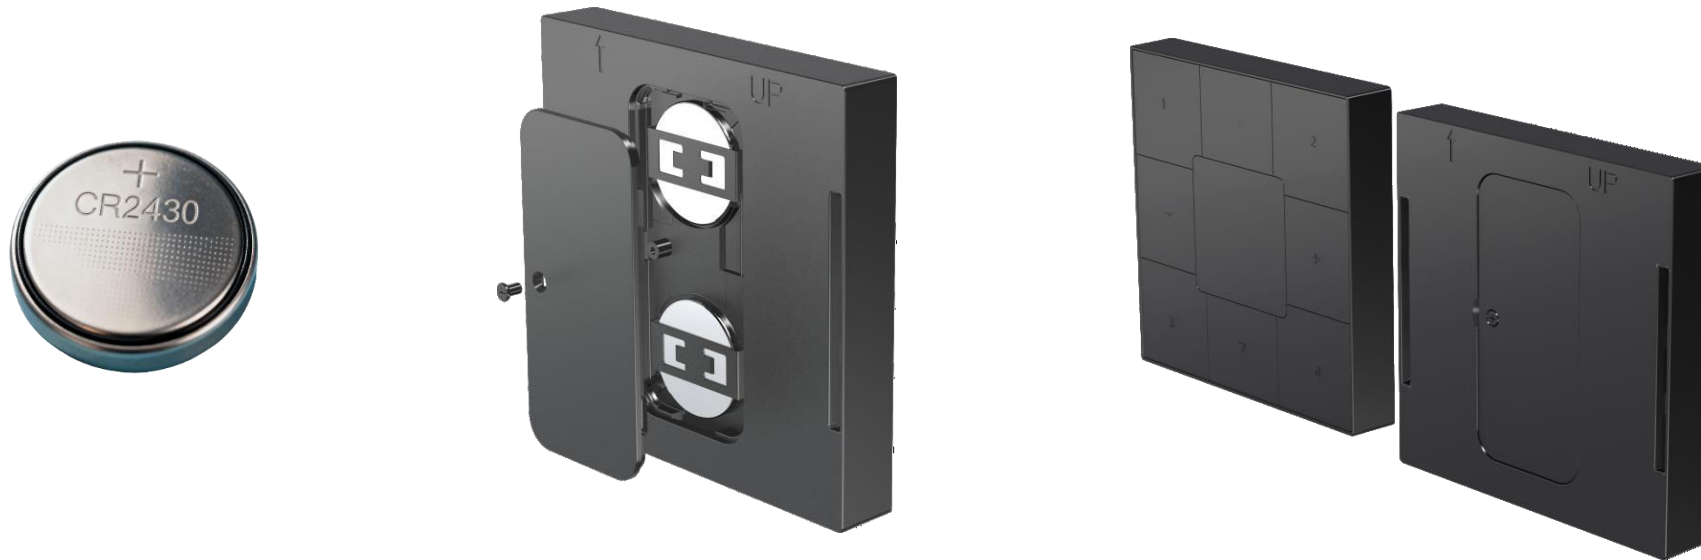




Installation Instructions


Handheld Mode

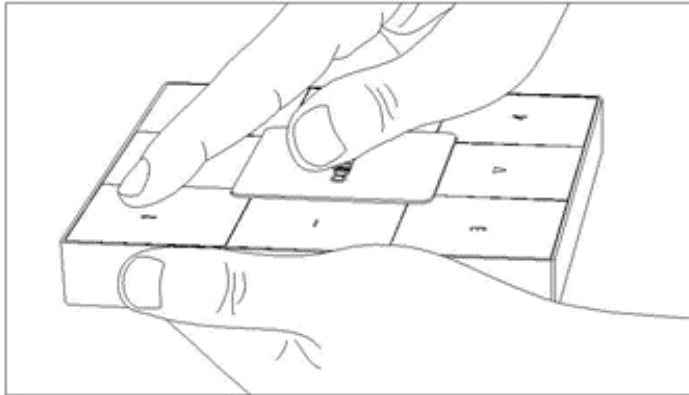

Wall-Mounted Mode

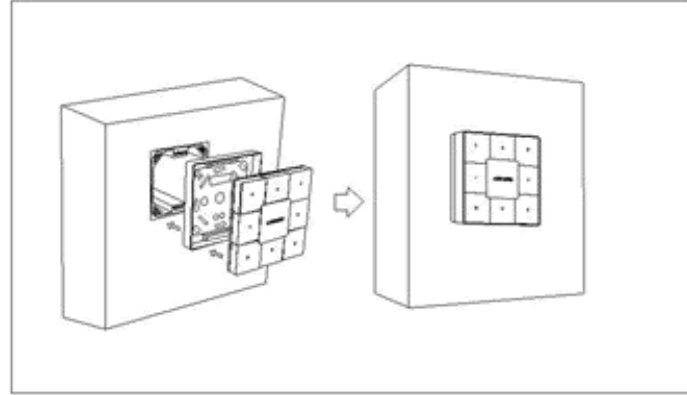


Magnetic Adsorption Mode

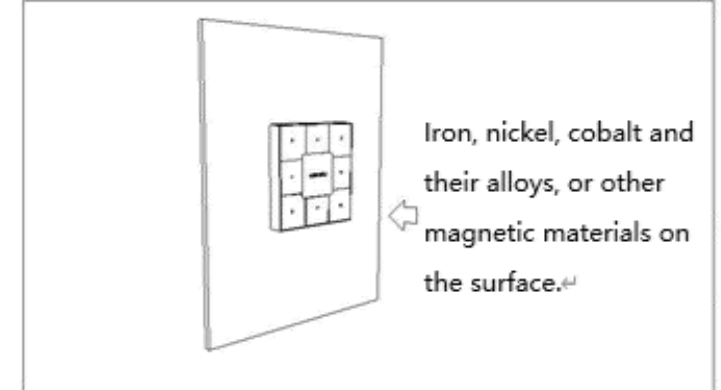





Installation Instructions

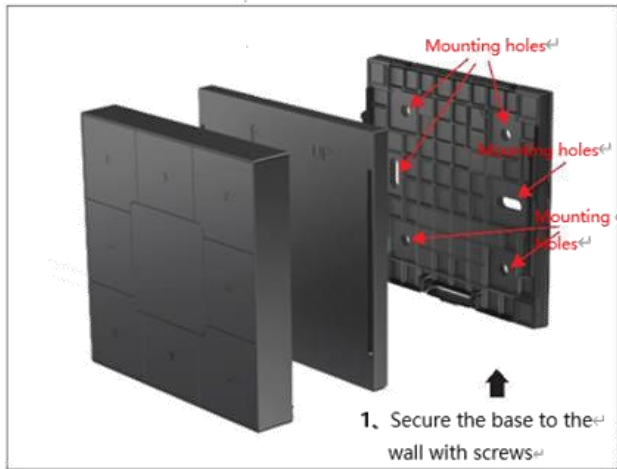

Wall-mounted state A

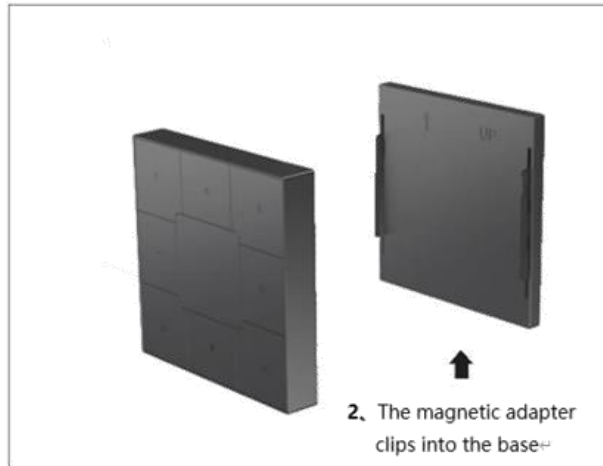


Wall-mounted state B

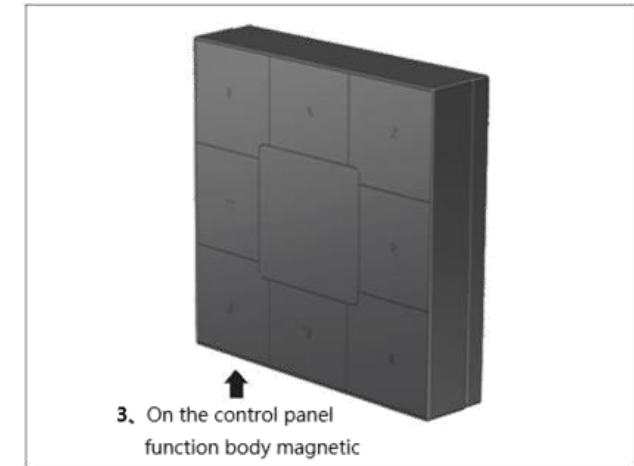

Wall-mounted state C



Button Functions Introduction

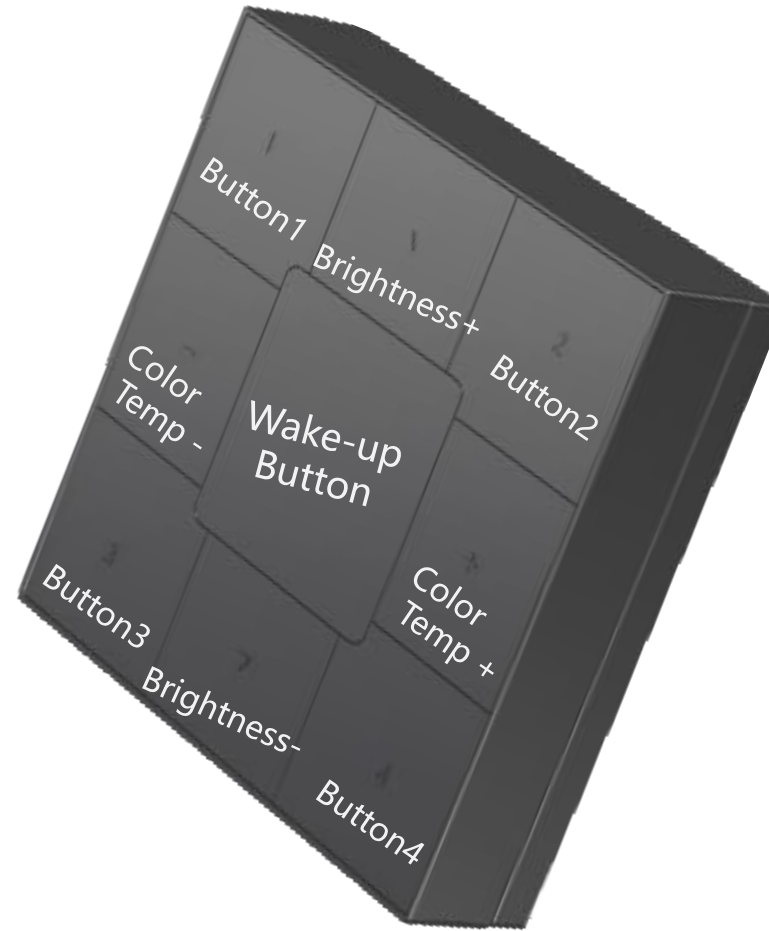



Button Functions Description

Button	Operation	Function
Wake-up Button	Press once	Turn on or off all the configured spotlights
	Long press for 3 seconds	Wake up the Bluetooth of the scene switch
Color temperature - button, button 1, brightness + button combination	Long press simultaneously for 3 seconds	Restore scene switch to factory settings
Button 1 / 2 / 3 / 4	Press once	1. If configured the device, press once will select and turn on or off the device. 2. If configured the group, press once will select and turn on or off the spotlights in the group. 3. If configured the scene, press once will select and execute the configured scene.
	Long press for 2 seconds	1. If configured device, press once will select the device. 2. If configured the group, press once will select the spotlights in the group. 3. If configured the scene, press once will select the spotlights in the scene.



Button Functions Description

Button	Operation	Function
Color temperature + button(right)/ color temperature -button(left)	Press once	color temperature of selected spotlights adjusts by $\pm 100\text{K}$
	Long press	color temperature of selected spotlights adjusts by $\pm 500\text{K}$ per second
Brightness + (Up)/ Brightness - (Down)	Press once	Brightness of selected spotlights adjusts by $\pm 1\%$
	Long press	Brightness of selected spotlights adjusts by $\pm 10\%$ per second
Brightness +(Up) Wake-up button combination	Long press Brightness + (Up) for 1 second, then long press Wake-up Button until spotlights reaches extreme value	1. If selected spotlights is off, it will make it turn on. 2. If selected spotlights is on, it will adjust the selected spotlights to maximum brightness.
Brightness - (Down) Wake-up button combination	Long press Brightness - (Down) for 1 second, then long press Wake-up Button until spotlights reaches extreme value	1. If selected spotlights is off, it will make it turn on. 2. If selected spotlights is on, it will adjust the selected spotlights to minimum brightness.



Button Functions Description

Button	Operation	Function
color temperature + button(right) Wake-up button combination	Long press Color Temp + for 1 second, then long press Wake-up Button until spotlights reaches extreme value	If selected spotlights is on, it will adjust the selected spotlights to maximum color temperature.
color temperature - button(left) Wake-up button combination	Long press Color Temp - for 1 second, then long press Wake-up Button until spotlights reaches extreme value	If selected spotlights is on, it will adjust the selected spotlights to minimum color temperature.



Indicator Light Status

Indication	Status
The green light flashes once	Button operation responded successfully / Sufficient battery
The red light flashes once	Low battery
The yellow light flashes once	Device restored to factory settings
The red, green, yellow lights flash in sequence	Device reset and rebooted



Download and Install APP

Scan the QR code or go to your app store

Search “SenseTrack” from App Store for iOS, or Google Play Store for Android

App Compatibility

iPhone: Requires iOS 13.0 or later

iPad: Requires iPadOS 13.0 or later

iPod touch: Requires iOS 13.0 or later

Mac: Requires macOS 11.0 or later and Mac with the Apple M1 chip

Android: V4.4 or later

Languages

English, Dutch





Sign Up and Login

- 01 Tap "Sign Up" to create your account and password.
- 02 Follow the instruction to complete "Sign Up" and enter "Log in" page.
- 03 Use your email and password to log in.

10:28 70%

Account Email

Password Enter password

☐ I agree to [Privacy Policy](#)

Log In

Sign Up Forgot Password



10:27 68%

< Sign up with Email

Email Email

Password Enter password

Password Enter password again

Name Enter name

Get Verification code by Email

Verification Code Enter code

Note.
When all information been filled out, press "send verifications code" and a message will be sent to your e-mail address.
Didn't received your code? Check your e-mail trash.

☐ I agree to [Privacy Policy](#)

Sign Up



10:29 70%

Account example_account

Password Enter password

☐ I agree to [Privacy Policy](#)





Log In

Sign Up Forgot Password



Create a Store


- 01 At first, create a store before adding any devices.
- 02 Tap "About" at the bottom of the APP page, choose "Store Management" and follow the steps to create a store. If you create a store, you will become the owner of the store.

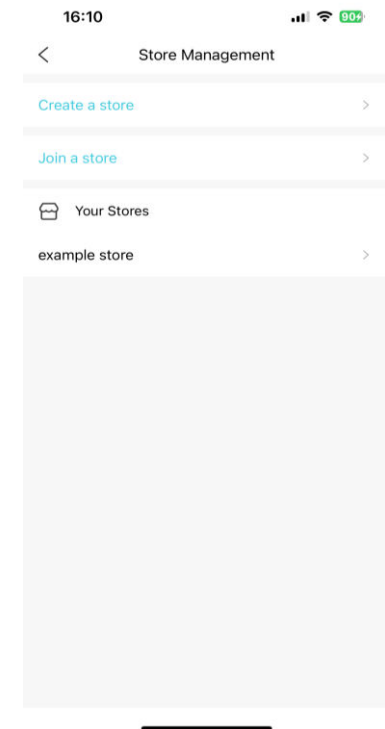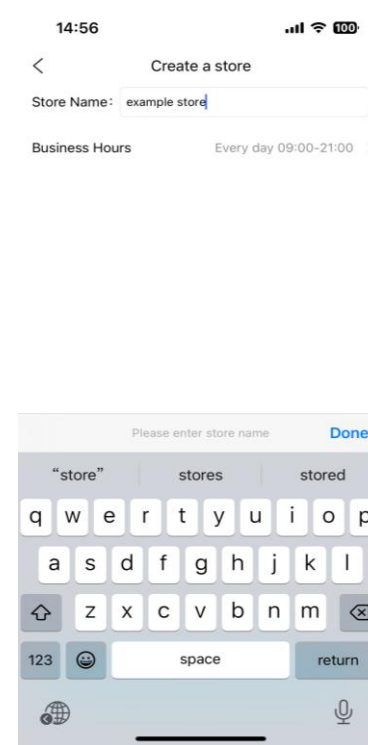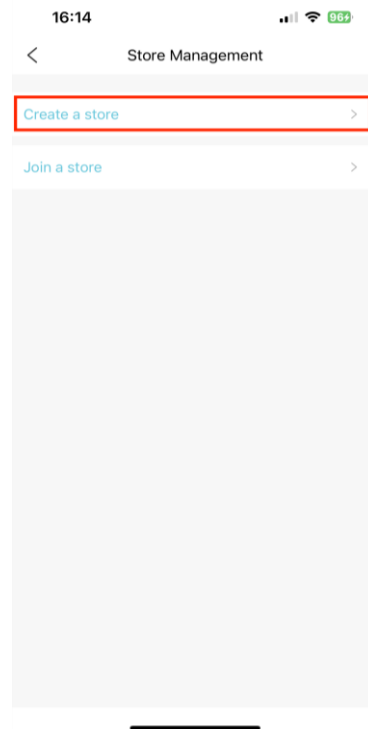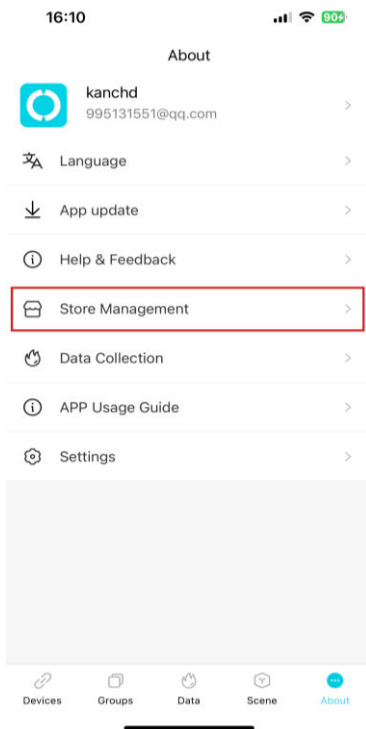



Add and Connect Devices: scene switch


- 01 Tap "Devices" at the bottom of the APP page, choose "Scene Switch" and then tap "Add new device" or the "+" icon in the upper right corner to enter the device searching page.
- 02 Press Wake-up Button for 3 seconds in the middle of the scene switch to enter Bluetooth pairing mode.
- 03 Wait until the scene switch information appears in the search list, then tap the scene switch icon and wait for "✓" to appear on the right to indicate a successful connection, finally tap "Done".

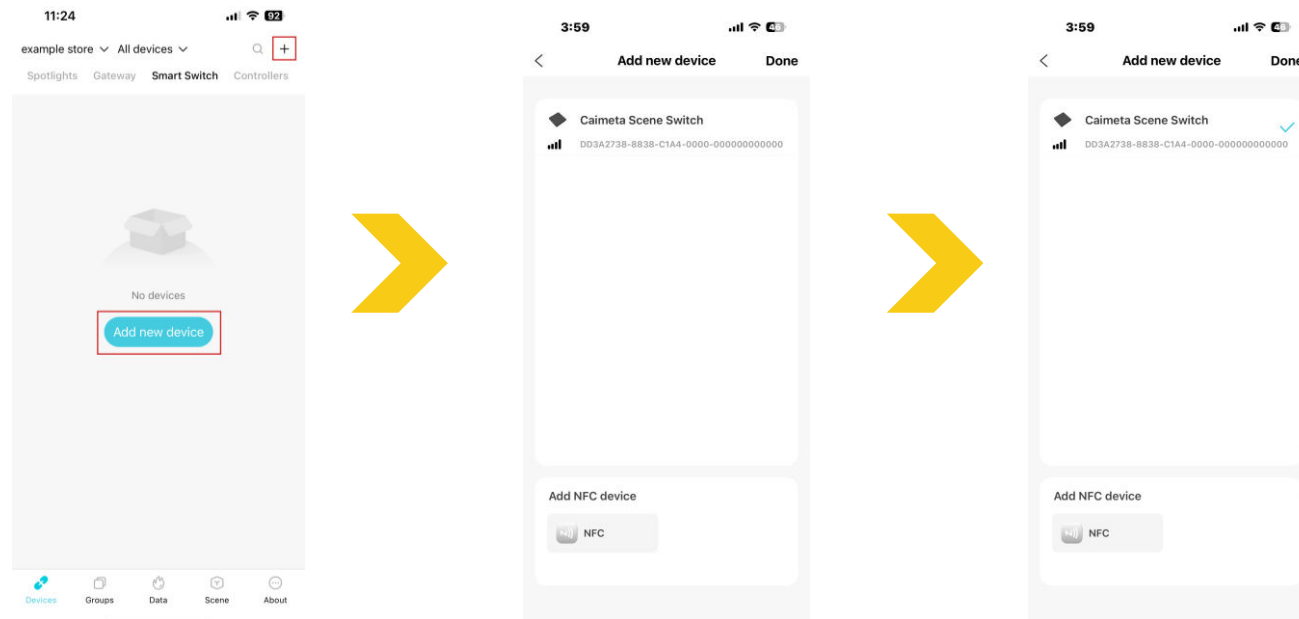



Add and Connect Devices: scene switch


- 04 After the connection is successful, enter a name for the device, then tap "Confirm".
- 05 Enter the settings page of the device, you can customize the scene switch settings as needed.

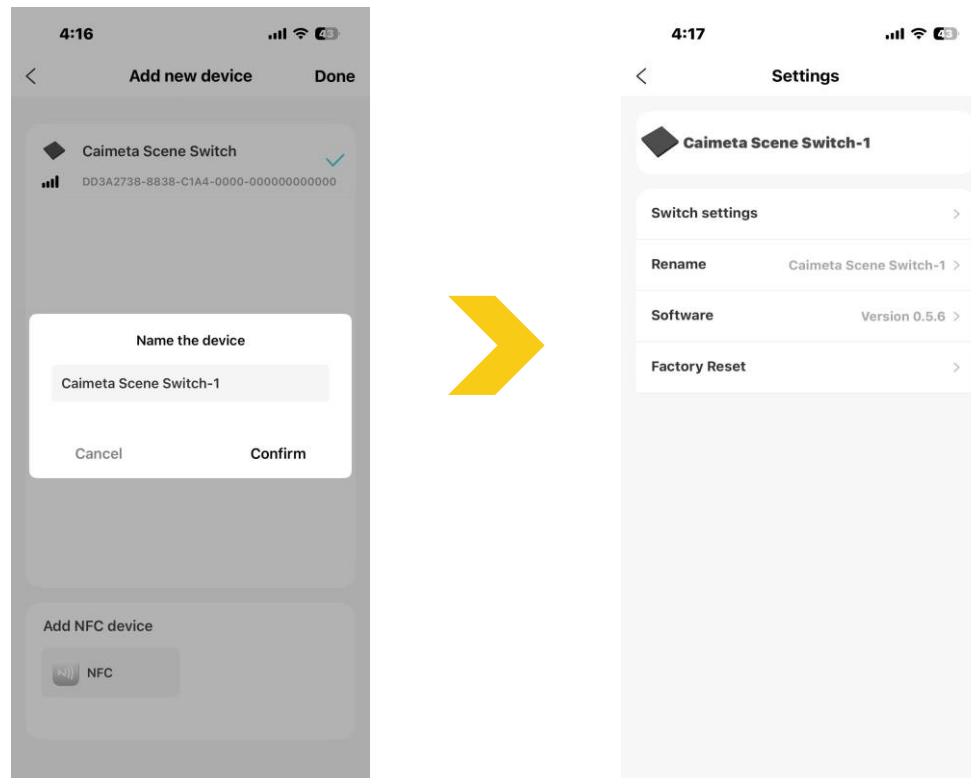



Wake Up Devices


- 06 When the app exits the setting page, the device will enter sleep mode. Tap the device icon and follow the prompts in the pop-up dialog box.
- 07 Press the Wake-up Button until the indicator light in the lower left corner of the device icon from red to green. Then tap the device icon again to enter the setting page.

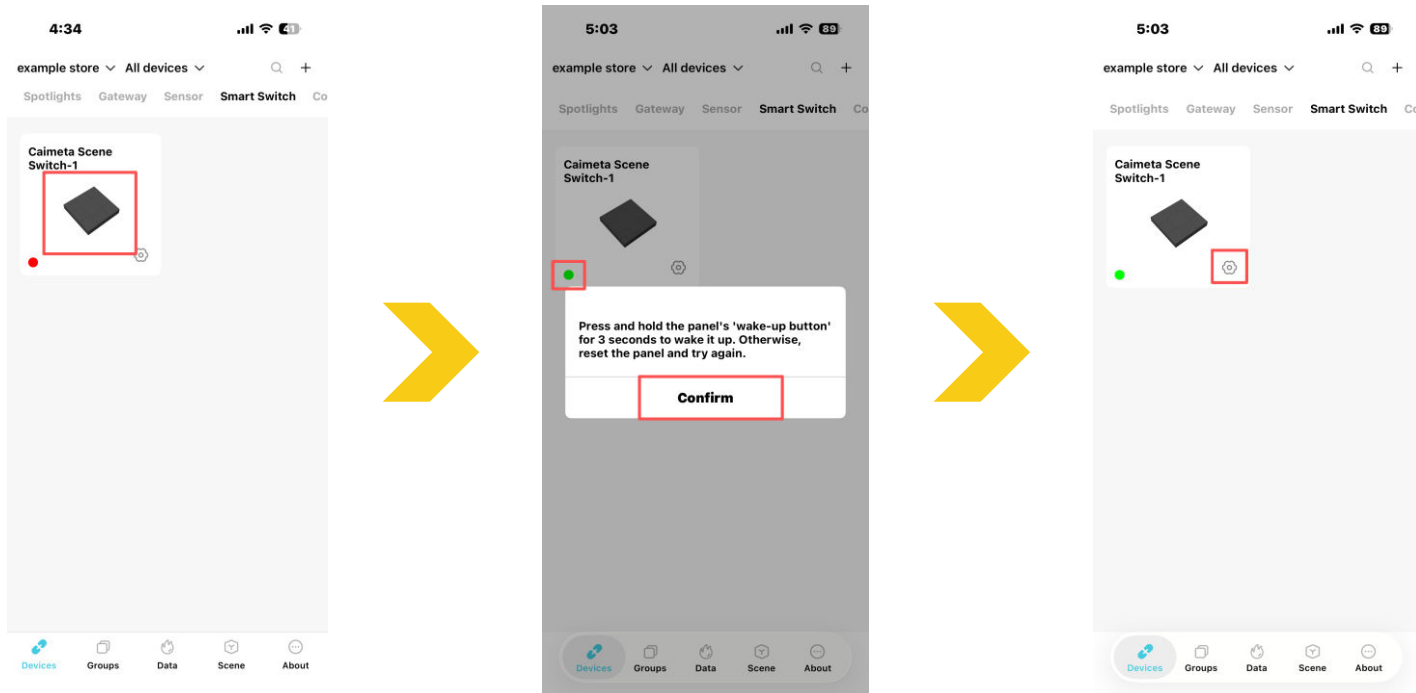



Basic Information Settings

- 01 Tap the device icon at the top of the settings page to view device details, where you can customize the device image and the device name.
- 02 Tap "Confirm" to return to the settings page.

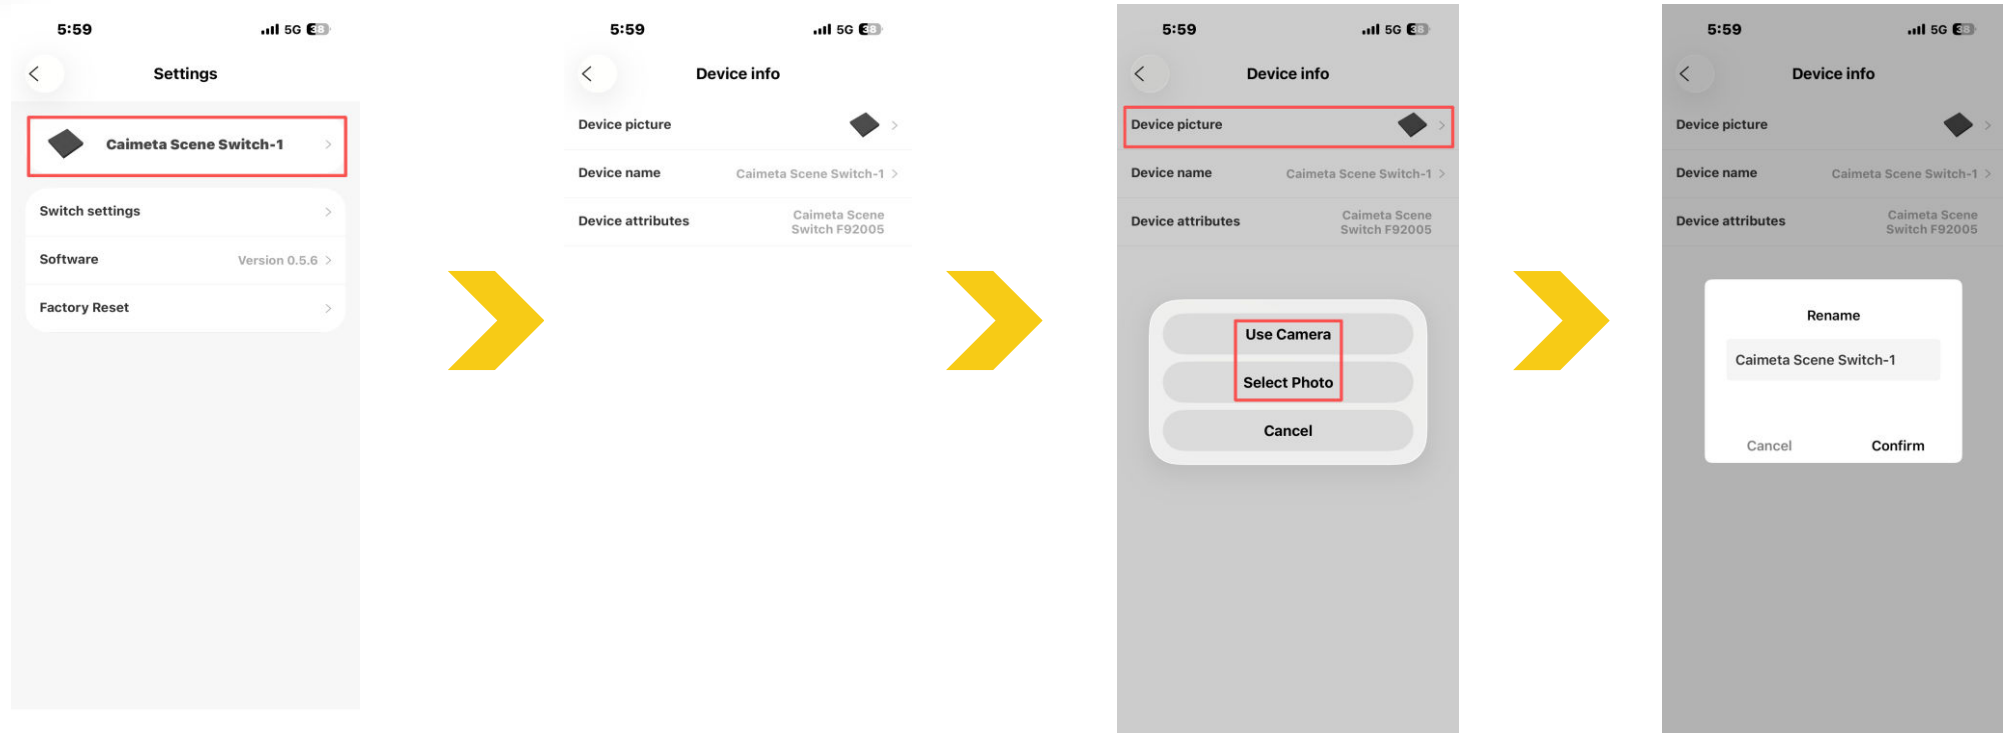




Software Update

- 01 Tap "Software" , and a pop-up window will appear.
- 02 Tap "Update" and follow the prompts to tap "Continue" , then press and hold the "Wake-up Button" for 3 seconds to start the upgrade process.

Note: Maintain a Bluetooth connection between the app and your device during the update process.
If an update failure message appears, the device may be being connected by someone else.
Please have that person disconnect or turn off Bluetooth before trying to update again.


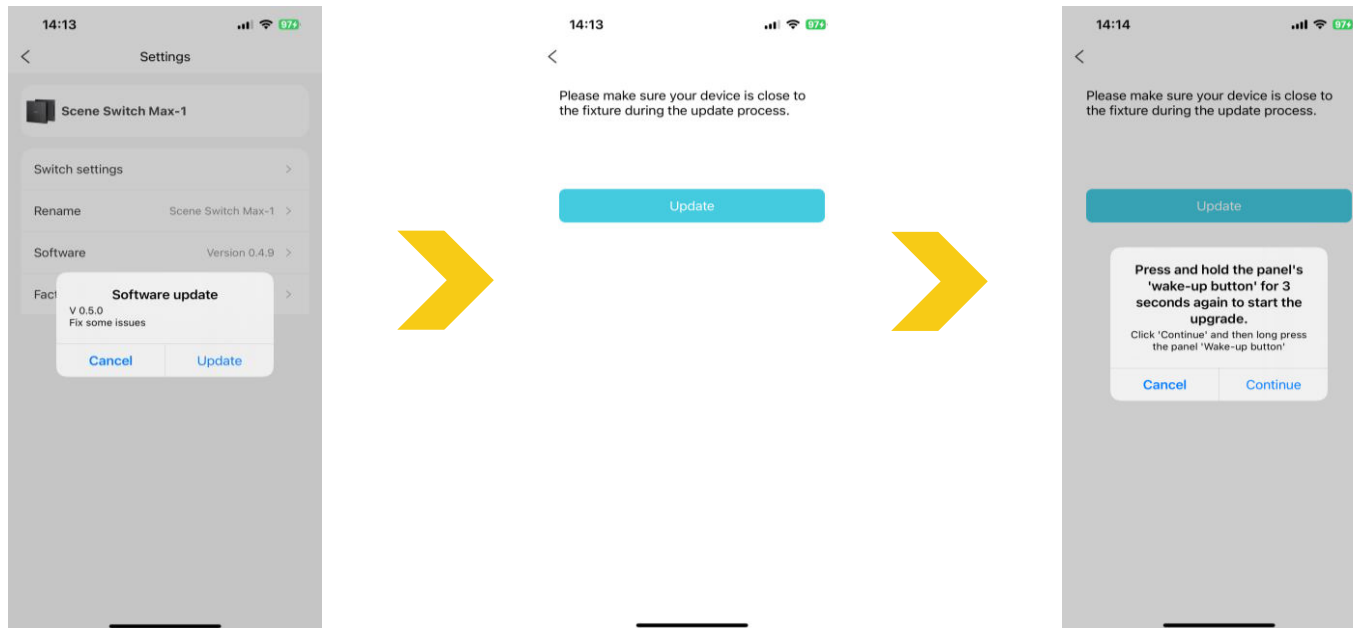




Add and Connect Devices: spotlights

- 01 Tap "Devices" at the bottom of the APP page, choose "Spotlights" and tap "Add new device" or the "+" icon in the upper right corner to enter the device searching page.
- 02 Wait until the spotlights information appears in the search list, then tap the spotlights icon and wait for the connection, when " ✓ " is displayed on the right to indicate a successful connection, then tap "Done".

Note: Spotlights without sensors are compatible with firmware version 0.5.6 and above; spotlights with sensors are compatible with firmware version 0.8.5 and above.

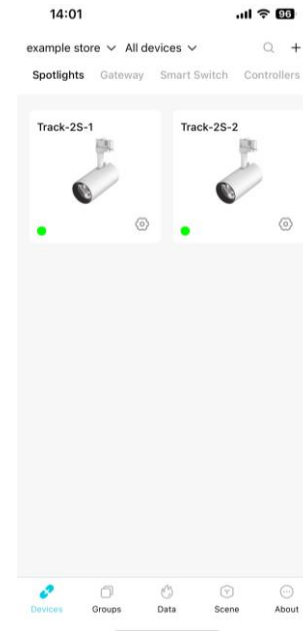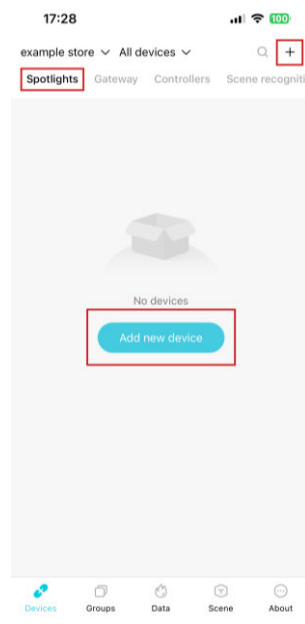




Switch Settings: control single device

01

Tap "Switch settings" to enter the configuration page, select "Button 1" → "Not Configured" , choose "Controls a Device" , and then return to select the device to be controlled.


Note: There are 4 buttons in total, which can control up to 4 devices.

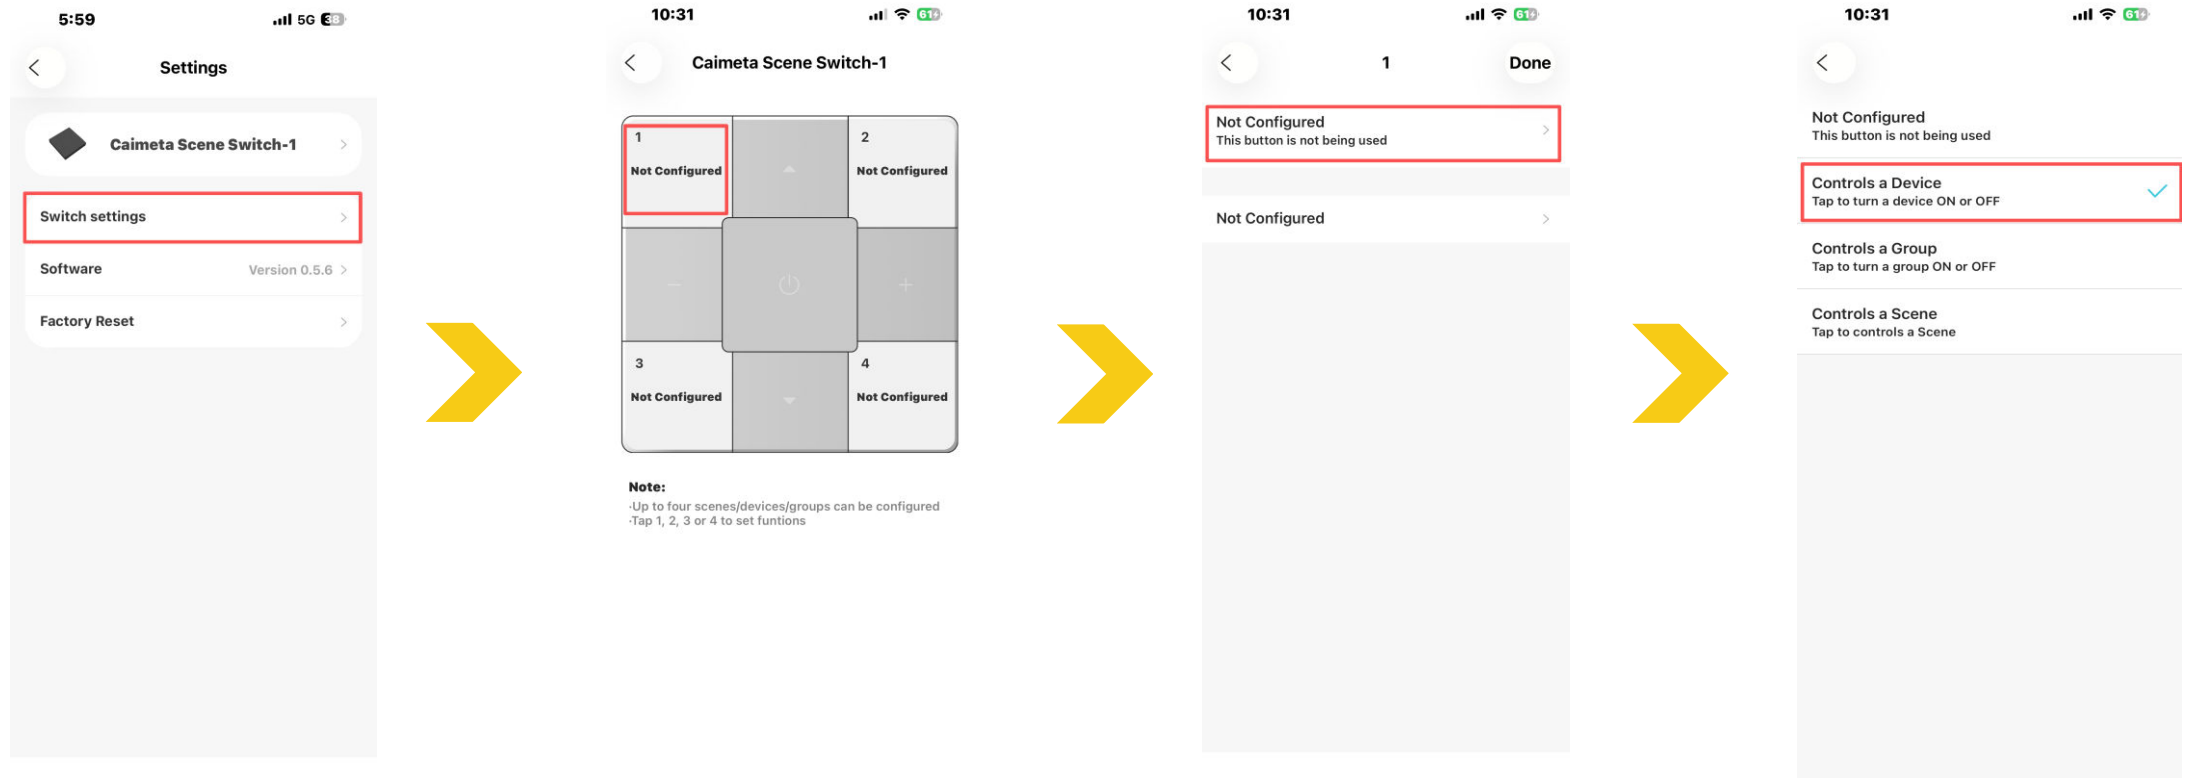



Switch Settings: control single device


- 02 Return to select the spotlights you want to control. Then tap "Done", the selected spotlights will be displayed in the device list.
- 03 Follow the steps above to complete the settings for the other buttons.

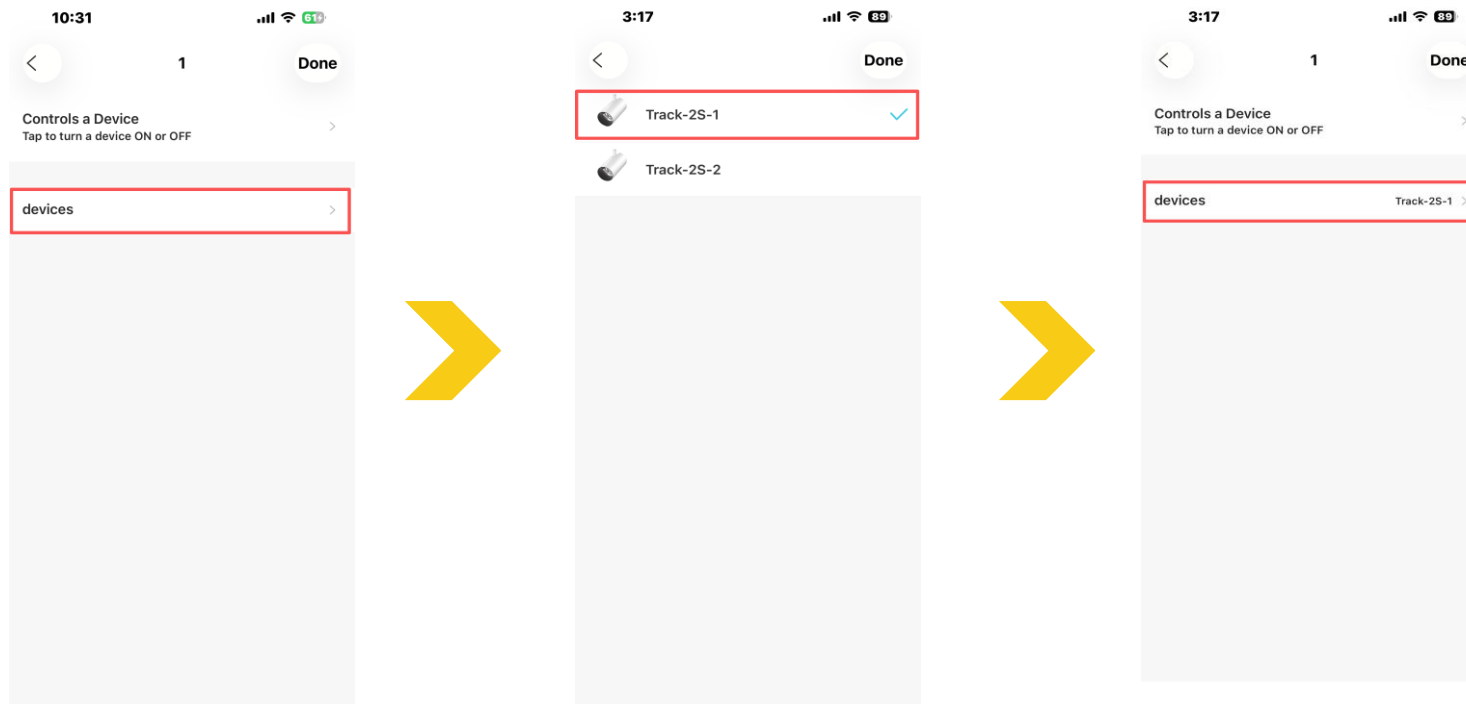



Create Groups and Add Devices


- 01 Tap "Groups" at the bottom of the APP page to enter the group settings page, and then tap the "+" icon in the upper right corner .
- 02 Enter the group name and select "Same Type" (only devices of the Same Type are supported), then tap "Confirm".

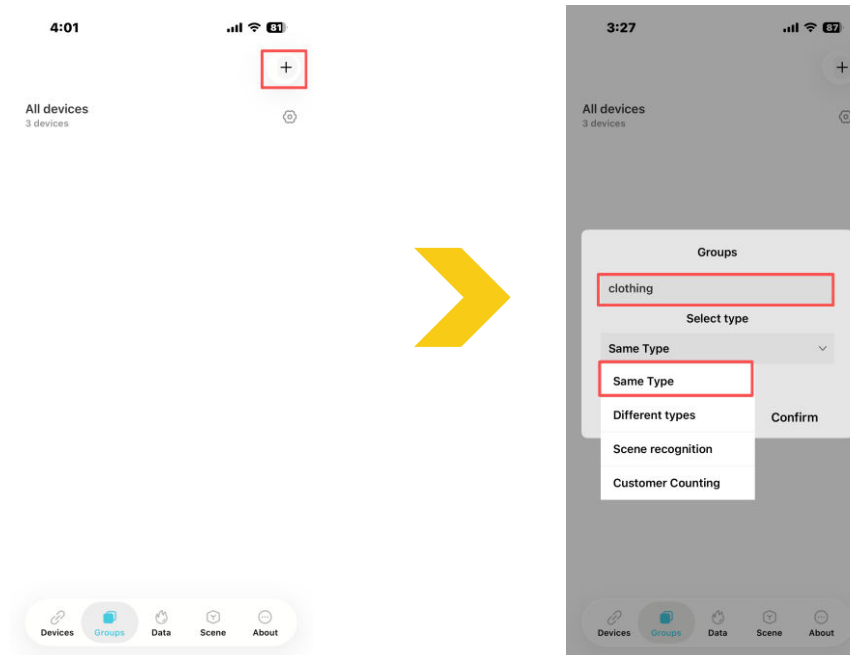



Create Groups and Add Devices

- 03 Select the devices which you want to add to the group, wait for " ✓ " to appear on the right to indicate successful addition.
- 04 Tap "Done" to return to the group page, where you can see the defined groups and the number of devices.

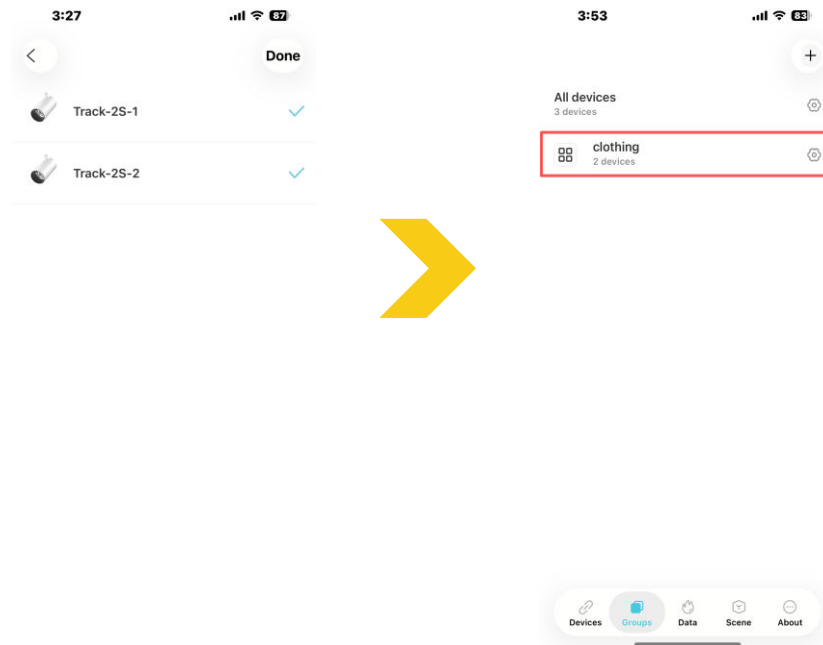



Delete Groups

01 Swipe left to delete a group.






Switch Settings: control groups

01

Tap "Switch settings" to enter the configuration page, select "Button 1" → "Not Configured" , choose "Controls a group" , and then return to select the groups to be controlled.

Note: There are 4 buttons in total, which can control a maximum of 4 groups.
For more than 5 devices, it is recommended to use groups first.

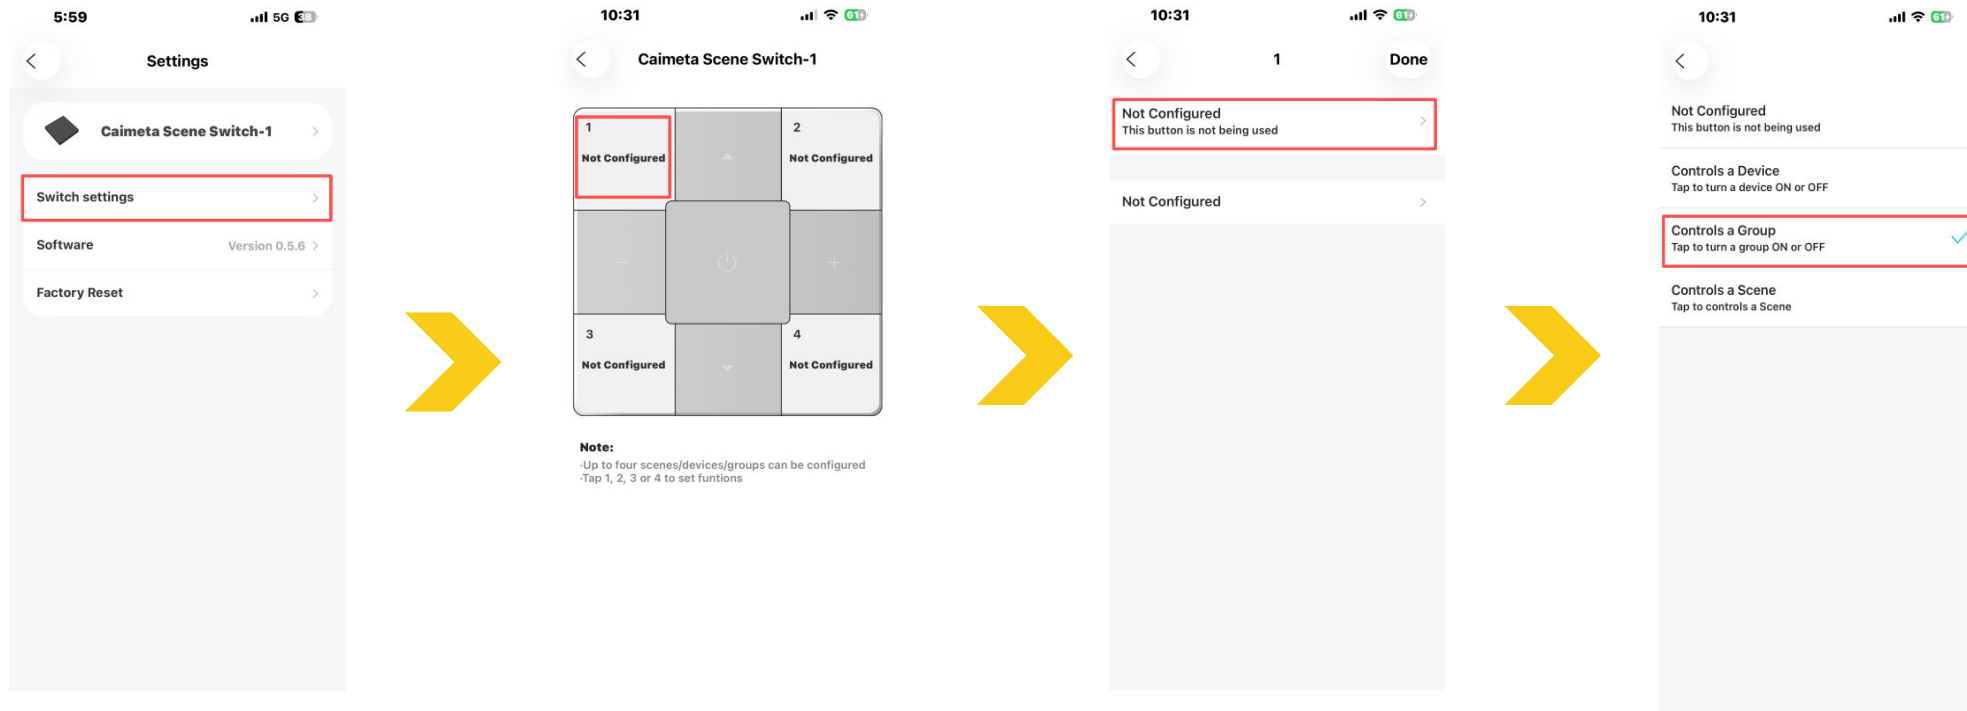



Switch Settings: control groups


- 02 Return to select the groups name to control, then tap "Done", the selected groups name will be displayed in the group list.
- 03 After setting, press "Button 1" to control the spotlights in the group to turn on or off at the same time.
- 04 Follow the steps above to complete the settings for the other buttons.





Create Scene and Add Devices

- 01 Tap "Scene" at the bottom of the APP page, tap "Add new device" or the "+" icon in the upper right corner, and enter the scene name.
- 02 Tap "Add Action" → Tap "Device" , select one of the devices, and select the action for the device: on, off, custom, or brightness adjustment. Finally tap "Done" .

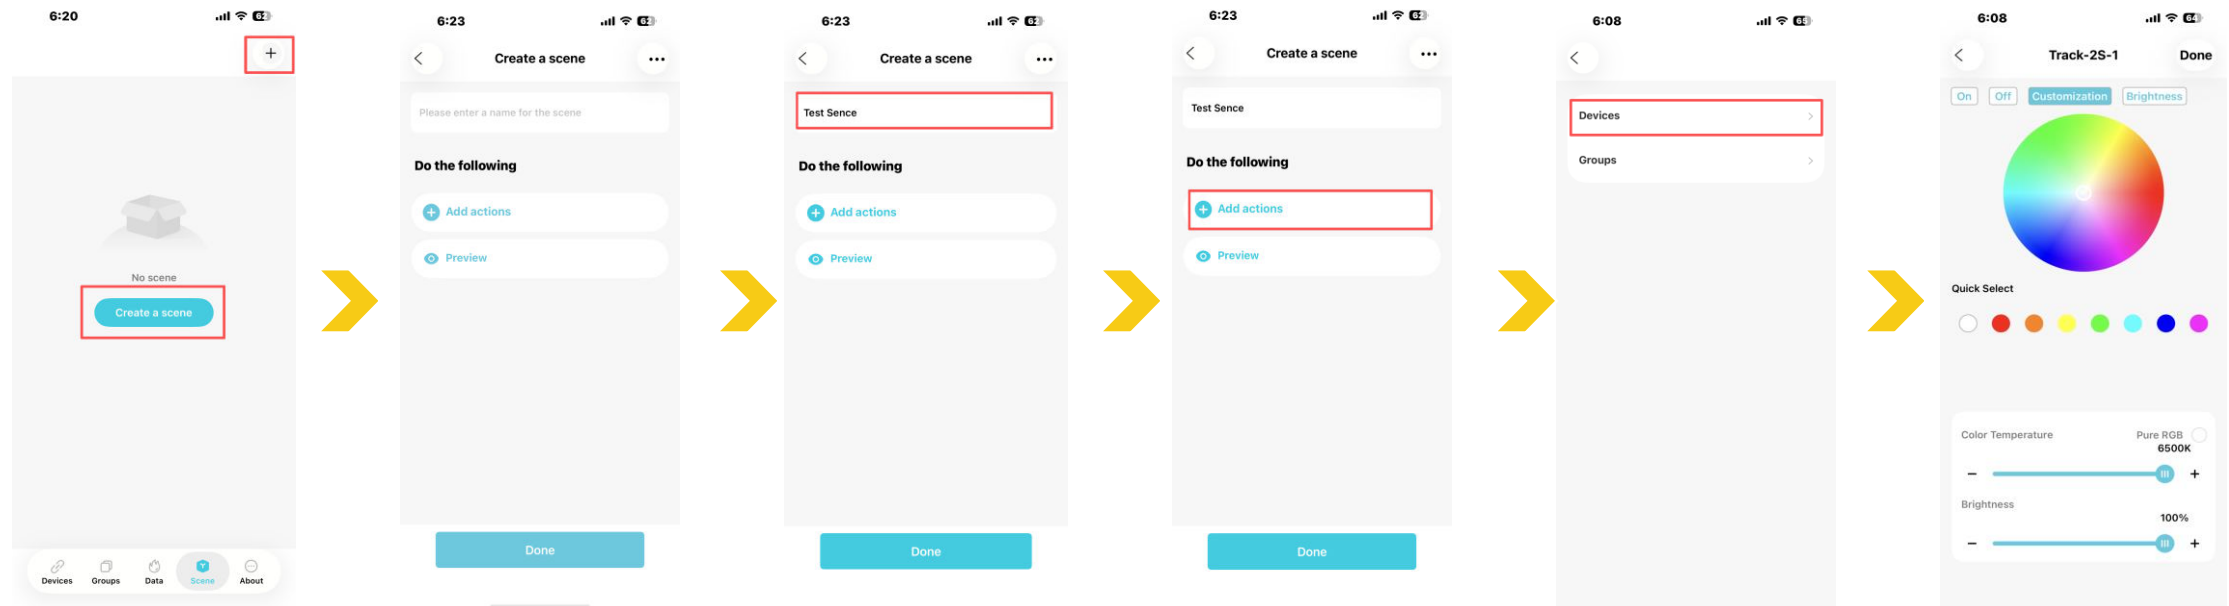




Create Scene and Add Devices

04


Add multiple devices or device groups to the scene, tap "Preview" to adjust the devices in the scene to the set state and check the effect, finally tap "Done" to save the scene settings.

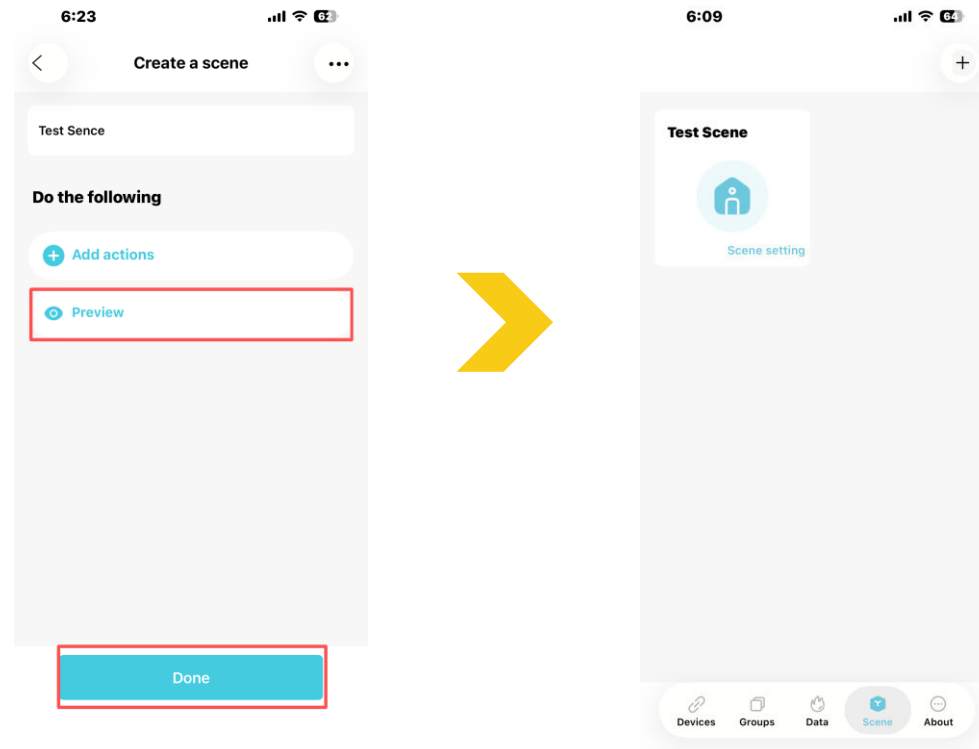



Create Scene and Add Devices


- 05 Tap "Scene settings" in the bottom right corner of the scene icon, then tap "Device" to modify the status and parameters of the device , finally tap "Done" .
- 06 Swipe left to remove the device from the scene, and finally tap "Done" to save the scene settings.

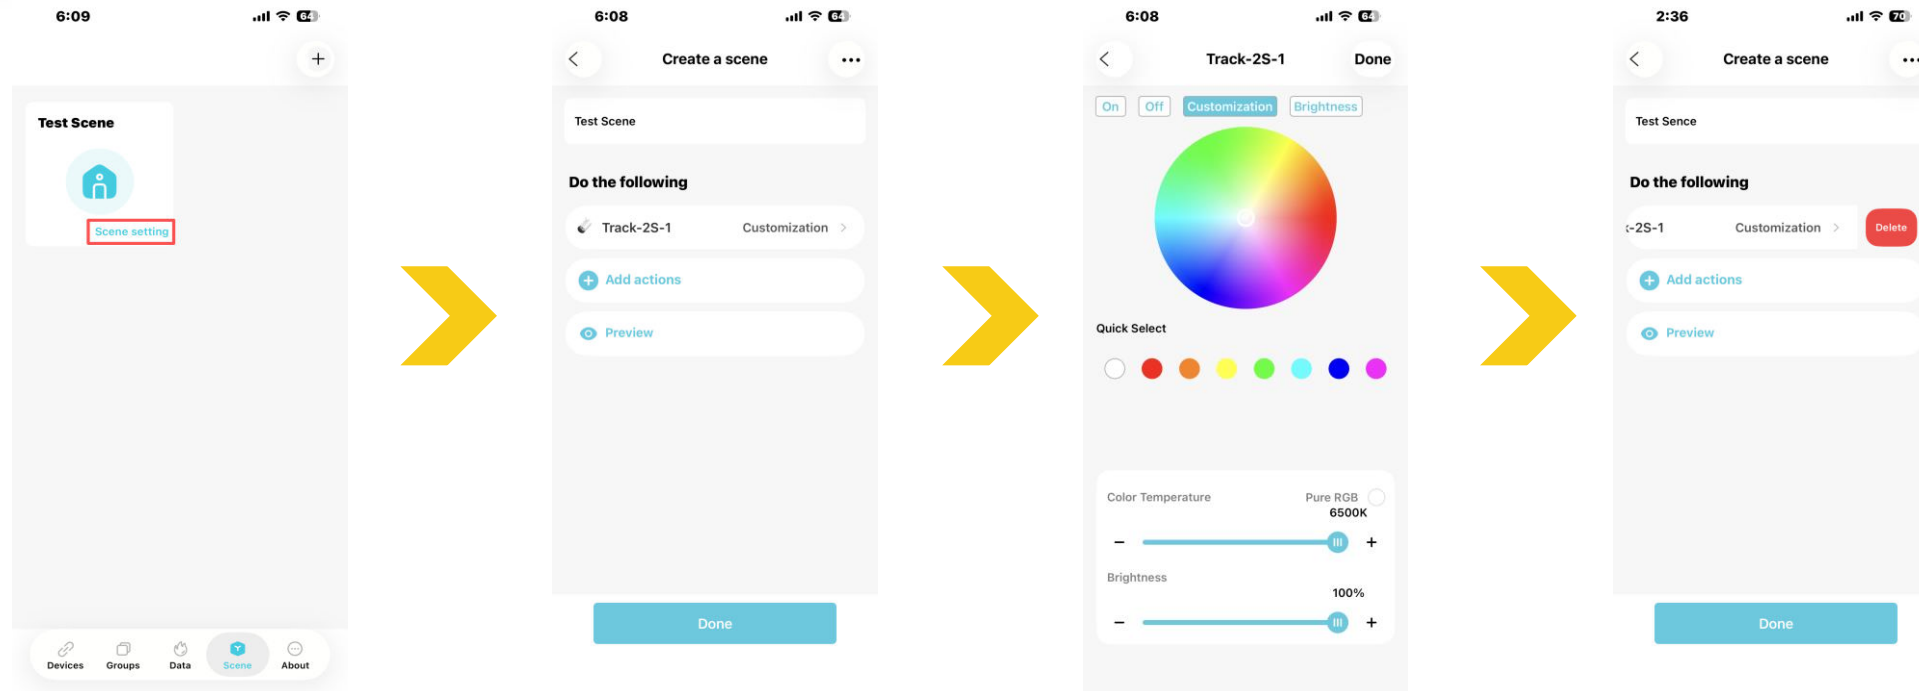



Delete Scenes

- 01 Long press the scene icon, and in the pop-up window, tap "Delete" to delete the scene.

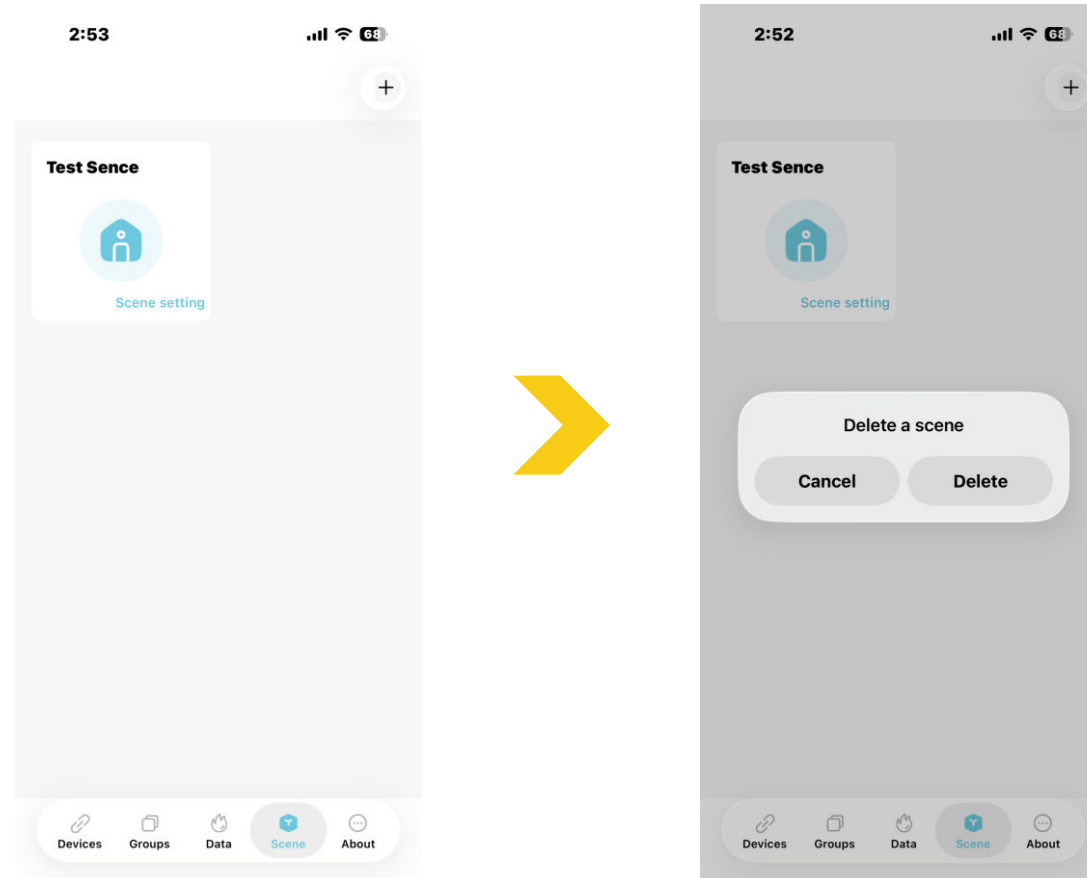




Switch Settings: control scenes

- 01 Tap "Switch settings" , enter the configuration page, select "Button 1" → "Not Configured" . choose "Controls a scene" , and then return to select the group to be controlled.





Note: There are 4 buttons in total, which can control up to 4 scenes.

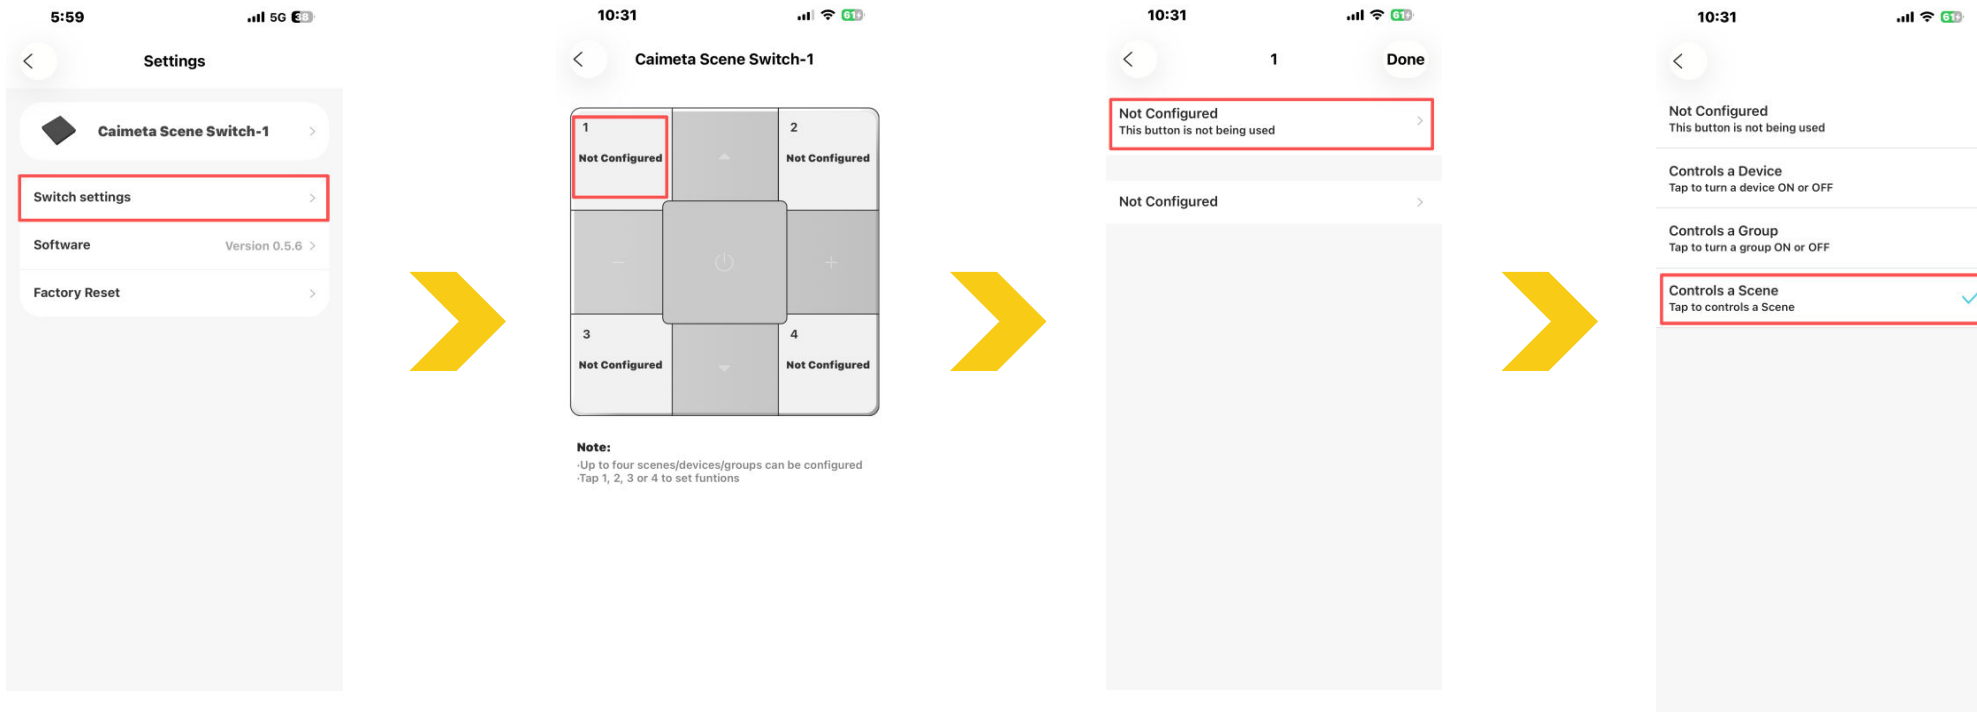



Switch Settings: control scenes



- 01 Return to select the scene name to control. Tap "Done" the selected scene name will be displayed in the device column.
- 02 After setting, press "Button 1" to control the spotlights that have been set (such as custom brightness and color temperature, on or off, etc.).
- 03 Follow the steps above to complete the settings for the other buttons.

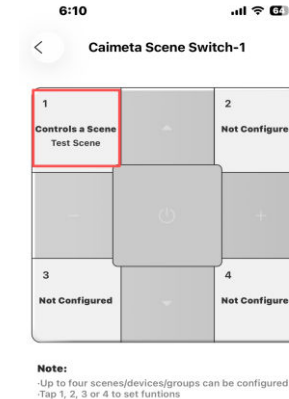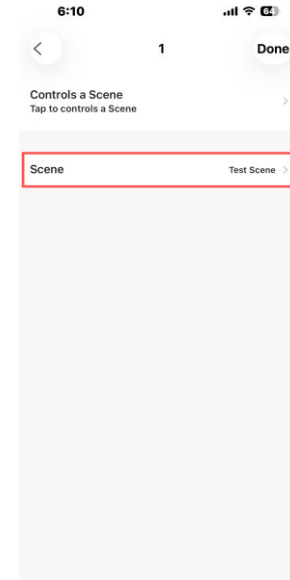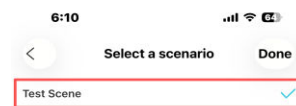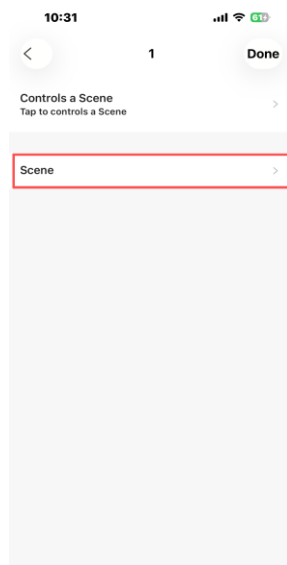



APP Reset Device

- 01 Tap "Settings" in the bottom right corner of the device icon to enter the settings page.
- 02 Tap "Factory Reset", then tap "Reset" to restore the device to factory settings and remove the device from the APP.

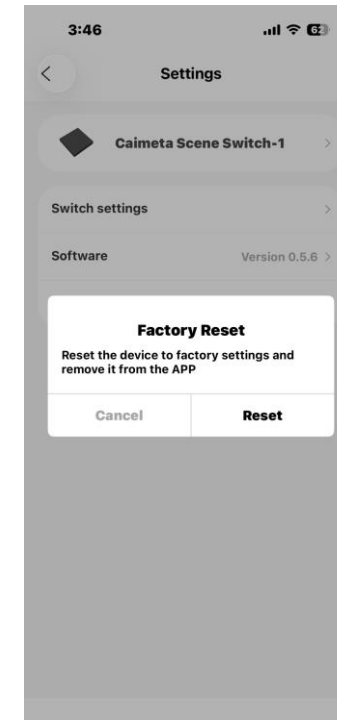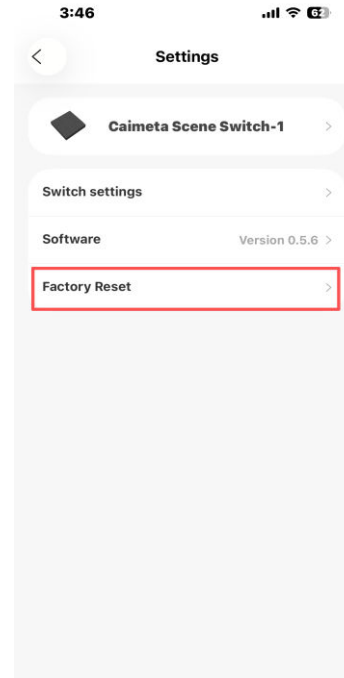



Offline Device Physical Reset

- 01 Long press the device icon, and in the pop-up confirmation dialog box, tap "Remove" to remove the device from the app.
Note: Before selecting remove, please ensure that the device can no longer connect to the app, if it can connect to the app, please use the app to restore factory settings.
- 02 If it confirm the device has been removed, the only way to reconnect it is through a physical reset.
- 03 Press Color Temperature – button, button 1, and Brightness + button simultaneously for 3 seconds to reset.
When the yellow light flash once indicates that the reset is complete.

