


Datasheet I 3 Wires adaptor



Picture for reference only

Product code	PRO-A340S
Color	Black / Grey / White
Color code	RAL 9005 / 7040 / 9016
Main materials	PC UL94V0+Copper
Load	50N
Unit weight	0.038 kg
Outer package QTY	60 PCS
Gross weight	7.4 Kg
Package size	508*328*200 mm
Voltage & Max.load	220-250V/6A(EU), 120V/6A(US)

Dimensions(mm)

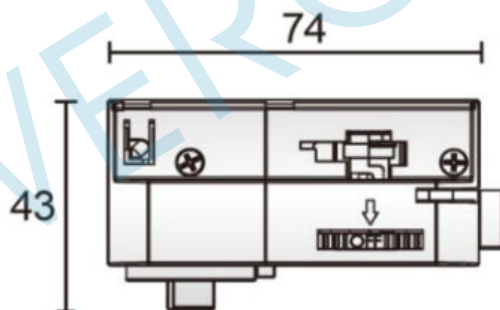

screws and spring enclosed,
nipple optional



Notes:
Apply to POWERGEAR
3 wires single circuit track system
Robust single circuit track system




Installation please read carefully before installing




Suitable for POWERGEAR 3 wires and robust single circuit track, and Halo compatible.



Tools




1.

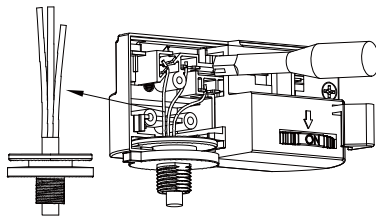


Wire spec (No need to peel or dip tin):
0.5-0.75mm², AWG 20, AWG 18.


2.

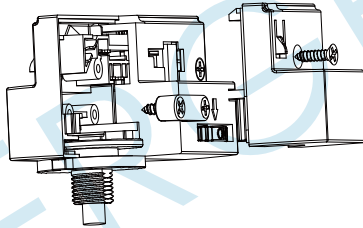

3.

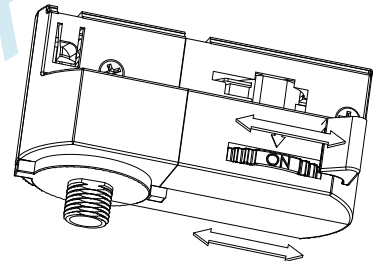


4.

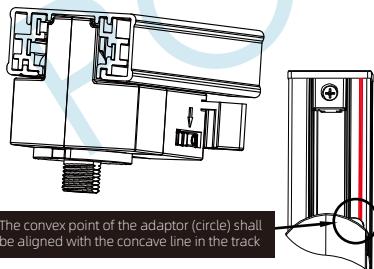


The convex point of the adaptor (circle) shall be aligned with the concave line in the track

5.

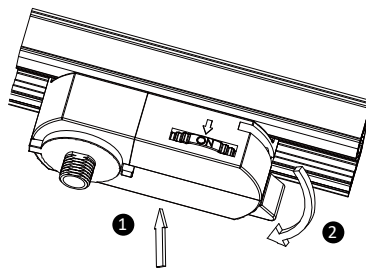

6.



Troubleshooting

1. Adaptor can not be loaded into the track: please note that step 4 has direction restrictions, and can not be reversed.
2. The handle can not be turned after loading into the track: in step 5, the adaptor must be fitted into track properly, then open the handle.
3. No electricity: please ensure step 1 wiring correct / firm.
4. The adaptor can not be disassembled from the track: Please check step 6 and ensure the handle has been returned. There will be a risk of damage on adaptor if not follow the steps!

Disclaimer

1. It is forbidden to apply paint, glue, etc. to this product.
2. This product is suitable for indoors, not outdoors.
3. It is recommended to use POWERGEAR track system, compatibility with other track system is not guaranteed.
4. If the structure or wiring of this product is not used/modified according to the instructions, resulting in damage to this product or related products, POWERGEAR doesn't continue to maintain the after-sales commitment.
5. Product optimization and version upgrade will not be prior noticed. Please refer to the actual product received. If you have any questions, please contact our sales staff in time;
6. POWERGEAR reserves the right of final interpretation of this product.